Char-Broil®

Grilling's Juicy Little Secret™

PRODUCT GUIDE
MODEL 463240613

Char-Broil Modular Stove Top Cart

IMPORTANT: Fill out the product record information below.

Serial Number _____
See rating label on grill for serial number.

Date Purchased _____

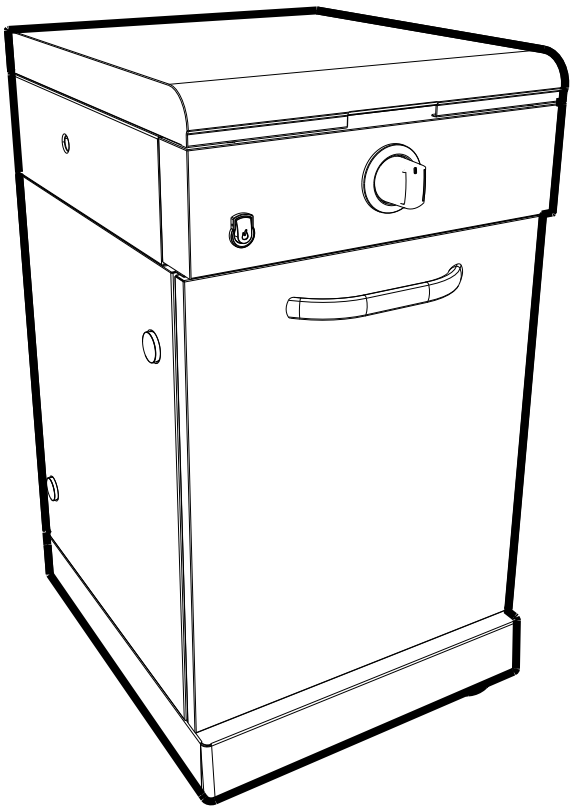

For support and to register your grill, please visit us at **www.charbroil.com**

If you have questions or need assistance during assembly, please call **1-800-241-7548**.

DUAL FUEL™

CONVERSION-READY

Easily converts from (LP) liquid propane to (NG) natural gas

Visit the grill accessory aisle for a complete kit.

© 2013 Char-Broil, LLC Columbus, GA 31902

Printed in China

Assembly instructions © 2013

11/20/12 • G250-001-020801

TABLE OF CONTENTS

For Your Safety 2-3

Use and Care 4-10

Limited Warranty 12

Parts List 13

Parts Diagram 14

Assembly 15-20

Conversion Instructions 21-24

Troubleshooting 25-27

Registration Card 31

Safety Symbols
The symbols and boxes shown below explain what each heading means. Read and follow all of the messages found throughout the manual.

WARNING

WARNING: Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

CAUTION

CAUTION: Indicates a potentially hazardous situation or unsafe practice which, if not avoided, may result in minor or moderate injury.

DANGER

DANGER: Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.

INSTALLER/ASSEMBLER:

Leave this manual with consumer.

CONSUMER:

Keep this manual for future reference.

DANGER

If you smell gas:

1. **Shut off gas to the appliance.**
2. **Extinguish any open flame.**
3. **Open lid.**
4. **If odor continues, keep away from the appliance and immediately call your gas supplier or your fire department.**

WARNING

1. **Do not store or use gasoline or other flammable liquids or vapors in the vicinity of this or any other appliance.**
2. **An LP cylinder not connected for use shall not be stored in the vicinity of this or any other appliance.**

WARNING

Failure to follow all manufacturer's instructions could result in serious personal injury and/or property damage.

CAUTION

For residential use only. Do not use for commercial cooking.

CAUTION

Read and follow all safety statements, assembly instructions, and use and care directions before attempting to assemble and cook.

CAUTION

Some parts may contain sharp edges.
Wear protective gloves if necessary.

THIS GRILL IS FOR OUTDOOR USE ONLY.

WARNING

CALIFORNIA PROPOSITION 65

1. Combustible by-products produced when using this product contains chemicals known to the State of California to cause cancer, birth defects, or other reproductive harm.

2. This product contains chemicals, including lead and lead compounds, known to the State of California to cause cancer, birth defects or other reproductive harm.

Wash your hands after handling this product.

Installation Safety Precautions

- Use grill, as purchased, only with LP (propane) gas and the regulator/valve assembly supplied. If your grill is Dual Fuel ready, a conversion kit must be purchased for use with natural gas.
- Grill installation must conform with local codes, or in their absence of local codes, with either the *National Fuel Gas Code, ANSI Z223.1/ NFPA 54, Natural Gas and Propane Installation Code, CSA B149.1, or Propane Storage and Handling Code, B149.2.*
- All electrical accessories (such as rotisserie) must be electrically grounded in accordance with local codes, or *National Electrical Code, ANSI / NFPA 70 or Canadian Electrical Code, CSA C22.1.* Keep any electrical cords and/or fuel supply hoses away from any hot surfaces.
- This grill is safety certified for use in the United States and/or Canada only. Do not modify for use in any other location. Modification will result in a safety hazard.

WARNING

Do not attempt to repair or alter the hose/valve/regulator for any "assumed" defect. Any modification to this assembly will void your warranty and create the risk of a gas leak and fire. Use only authorized replacement parts supplied by manufacturer.

NOTE: DO NOT over tighten screws and washers that come into contact with porcelain coated surfaces. Over tightening may cause the porcelain coating to crack and break, resulting in exposed metal that will be prone to rust.

CAUTION

Grease Fires

- **Putting out grease fires by closing the lid is not possible. Grills are well ventilated for safety reasons.**
- **Do not use water on a grease fire. Personal injury may result. If a grease fire develops, turn knobs and LP tank off.**
- **If grill has not been regularly cleaned, a grease fire can occur that may damage the product. Pay close attention while preheating or burning off food residue to insure that a grease fire does not develop. Follow instructions on General Grill Cleaning and Cleaning The Burner Assembly to prevent grease fires.**
- **The best way to prevent grease fires is regular cleaning of the grill.**

USE AND CARE

DANGER

- **NEVER store a spare LP cylinder under or near the appliance or in an enclosed area.**

- **Never fill a cylinder beyond 80% full.**
- **An over filled or improperly stored cylinder is a hazard due to possible gas release from the safety relief valve. This could cause an intense fire with risk of property damage, serious injury or death.**
- **If you see, smell or hear gas escaping, immediately get away from the LP cylinder/appliance and call your fire department.**

LP Cylinder Removal, Transport and Storage

•Turn OFF all control knobs and LP cylinder valve. Turn coupling nut counterclockwise by hand only - do not use tools to disconnect. Loosen cylinder screw beneath bottom shelf or disconnect other retention means, then lift PL cylinder up and and out of cart. Install safety cap onto LP cylinder valve. Always use cap and strap supplied with valve.
Failure to use safety cap as directed may result in serious personal injury and/or property damage.

•A disconnected LP cylinder in storage or being transported must have a safety cap installed (as shown). Do not store an LP cylinder in enclosed spaces such as a carport, garage, porch, covered patio or other building. Never leave an LP cylinder inside a vehicle which may become overheated by the sun.



•Do not store an LP cylinder in an area where children play.

LP Cylinder

•The LP cylinder used with your grill must meet the following requirements:

•Use LP cylinders only with these required measurements: 12" (30.5cm) (diameter) x 18" (45.7 cm) (tall) with 20 lb. (9 kg.) capacity maximum.

•LP cylinders must be constructed and marked in accordance with specifications for LP cylinders of the U.S. Department of Transportation (DOT) or for Canada, CAN/CSA-B339, cylinders, spheres and tubes for transportation of dangerous goods. Transport Canada (TC). See LP cylinder collar for marking.

•LP cylinder valve must have:
- •Type 1 outlet compatible with regulator or grill.
- •Safety relief valve.
- •UL listed Overfill Protection Device (OPD). This OPD safety feature is identified by a unique triangular hand wheel. **Use only LP cylinders equipped with this type of valve.**



OPD Hand Wheel

•LP cylinder must be arranged for vapor withdrawal and include collar to protect LP cylinder valve. Always keep LP cylinders in upright position during use, transit or storage.

LP cylinder in upright position for vapor withdrawal

LP (Liquefied Petroleum Gas)

•LP gas is nontoxic, odorless and colorless when produced. **For Your Safety**, LP gas has been given an odor (similar to rotten cabbage) so that it can be smelled.

•LP gas is highly flammable and may ignite unexpectedly when mixed with air.

LP Cylinder Filling

•Use only licensed and experienced dealers.

•LP dealer **must purge new cylinder** before filling.

•Dealer should **NEVER** fill LP cylinder more than 80% of LP cylinder volume. Volume of propane in cylinder will vary by temperature.

•A frosty regulator indicates gas overfill. Immediately close LP cylinder valve and call local LP gas dealer for assistance.

•Do not release liquid propane (LP) gas into the atmosphere. This is a hazardous practice.

•To remove gas from LP cylinder, contact an LP dealer or call a local fire department for assistance. Check the telephone directory under “Gas Companies” for nearest certified LP dealers.

LP Cylinder Exchange

•Many retailers that sell grills offer you the option of replacing your empty LP cylinder through an exchange service. Use only those reputable exchange companies that inspect, precision fill, test and certify their cylinders. **Exchange your cylinder only for an OPD safety feature-equipped cylinder as described in the "LP Cylinder" section of this manual.**

•Always keep new and exchanged LP cylinders in upright position during use, transit or storage.

•**Leak test new and exchanged LP cylinders BEFORE connecting to grill.**

•Place dust cap on cylinder valve outlet whenever the cylinder is not in use. Only install the type of dust cap on the cylinder valve outlet that is provided with the cylinder valve. Other types of caps or plugs may result in leakage of propane.

LP Cylinder Leak Test

For your safety

•Leak test must be repeated each time LP cylinder is exchanged or refilled.

•Do not smoke during leak test.

•Do not use an open flame to check for gas leaks.

•Grill must be leak tested outdoors in a well-ventilated area, away from ignition sources such as gas fired or electrical appliances. During leak test, keep grill away from open flames or sparks.

•Use a clean paintbrush and a 50/50 mild soap and water solution. Brush soapy solution onto areas indicated by arrows in figure below.

▲ **Do not use household cleaning agents.** Damage to gas train components can result.

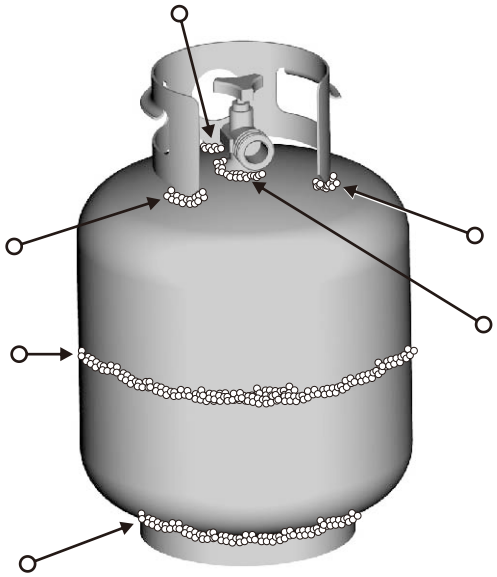

WARNING

If “growing” bubbles appear do not use or move the LP cylinder. Contact an LP gas supplier or your fire department!

Connecting Regulator to the LP Cylinder

1.LP cylinder must be properly secured onto grill. (Refer to assembly section.)

2.Turn all control knobs to the OFF position.

3.Turn LP cylinder OFF by turning hand-wheel clockwise to a **full stop**.

4.Remove the protective cap from LP cylinder valve. Always use cap and strap supplied with valve.

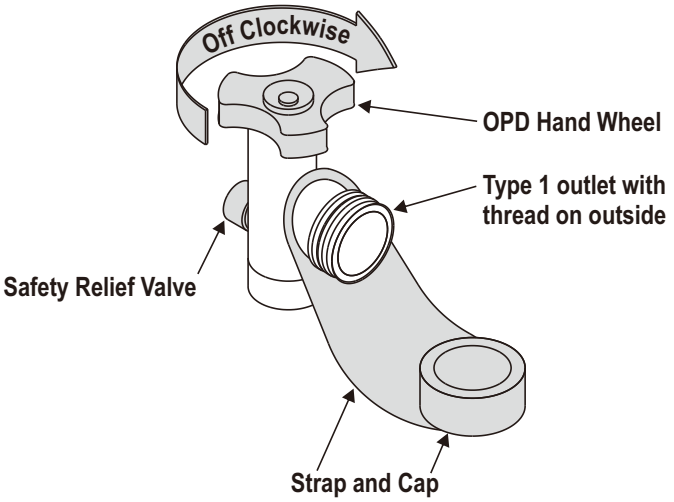



Do not use a POL transport plug (plastic part with external threads)! It will defeat the safety feature of the valve.

5.Hold regulator and insert nipple into LP cylinder valve. Hand-tighten the coupling nut, holding regulator in a straight line with LP cylinder valve so as not to cross-thread the connection.

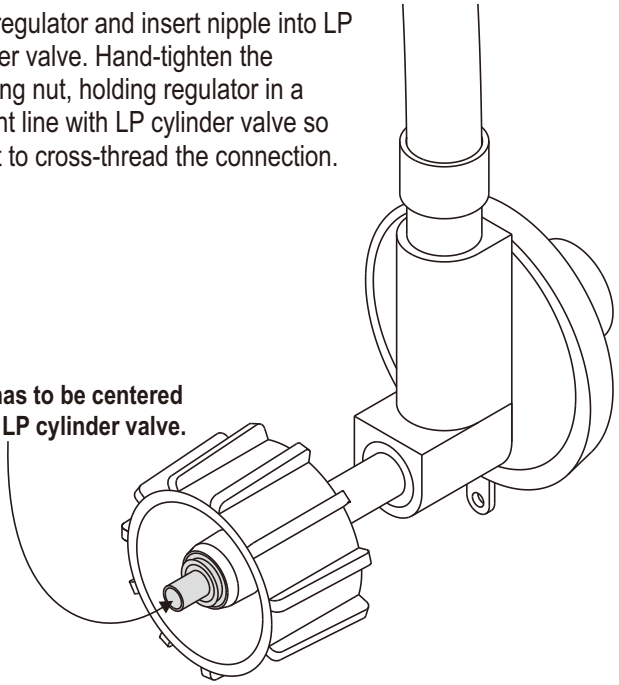

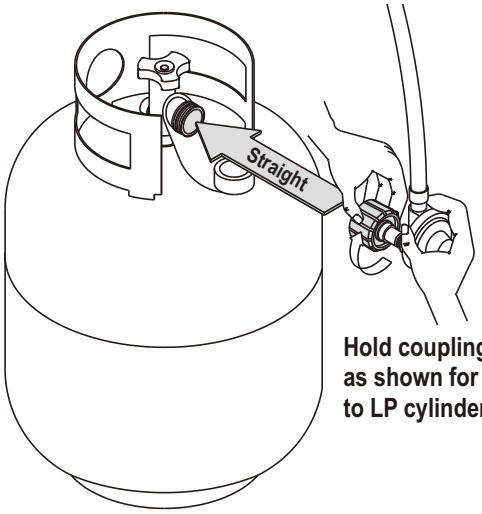

Hold coupling nut and regulator as shown for proper connection to LP cylinder valve.

6.Turn the coupling nut clockwise and tighten to a full stop. The regulator will seal on the back-check feature in the LP cylinder valve, resulting in some resistance. **An additional one-half to three-quarters turn is required to complete the connection. Tighten by hand only – do not use tools.**

NOTE:

If you cannot complete the connection, disconnect regulator and repeat steps 5 and 6. If you are still unable to complete the connection, **do not use this regulator!**

DANGER

- Do not insert any tool or foreign object into the valve outlet or safety relief valve. You may damage the valve and cause a leak. Leaking propane may result in explosion, fire, severe personal injury, or death.

WARNING

- Outdoor gas appliance is not intended to be installed in or on a boat.
- Outdoor gas appliance is not intended to be installed in or on an RV.
- Never attempt to attach this grill to the self-contained LP gas system of a camper trailer or motor home.
- Do not use grill until leak-tested.
- If a leak is detected at any time, STOP and call the fire department.
- If you cannot stop a gas leak, *immediately* close LP cylinder valve and call LP gas supplier or your fire department!

Leak Testing Valves, Hose and Regulator

1.Turn all grill control knobs to OFF.

2.Be sure regulator is tightly connected to LP cylinder.

3.Completely open LP cylinder valve by turning hand wheel counterclockwise. If you hear a *rushing sound*, turn gas off immediately. There is a major leak at the connection. **Correct before proceeding**.

4.Brush soapy solution onto areas circled below, or other similar fittings on your grill.

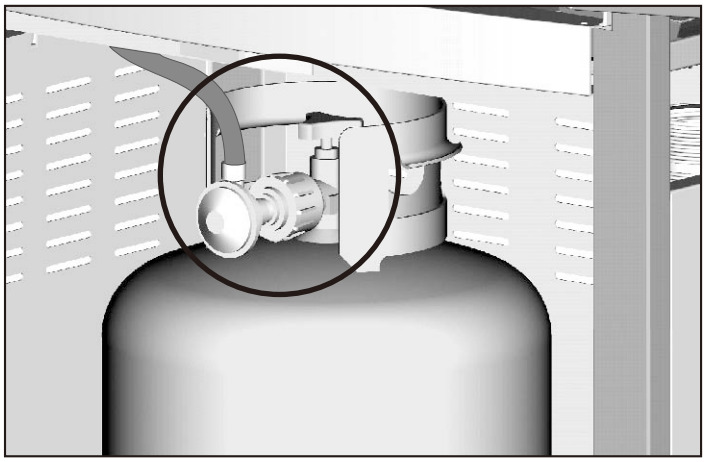

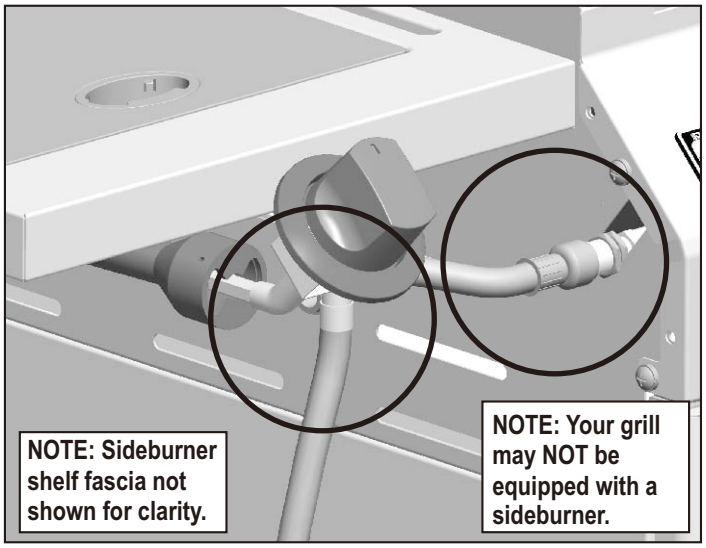

5.If "growing" bubbles appear, there is a leak. Close LP cylinder valve immediately and retighten connections. **If leaks cannot be stopped do not try to repair.** Call for replacement parts.

6.Always close LP cylinder valve after performing leak test by turning hand wheel clockwise.

WARNING

For Safe Use of Your Grill and to Avoid Serious Injury:

- Do not let children operate or play near grill.
- Keep grill area clear and free from materials that burn.
- Do not block holes in sides or back of grill.
- Check burner flames regularly, through viewing ports.
- Use grill only in well-ventilated space. NEVER use in enclosed space such as carport, garage, porch, covered patio, or under an overhead structure of any kind.
- Do not use charcoal or ceramic briquets in a gas grill. (*Unless briquets are supplied with your grill.)*
- **Use grill at least 3 ft. from any wall or surface.** Maintain 10 ft. clearance to objects that can catch fire or sources of ignition such as pilot lights on water heaters, live electrical appliances, etc.

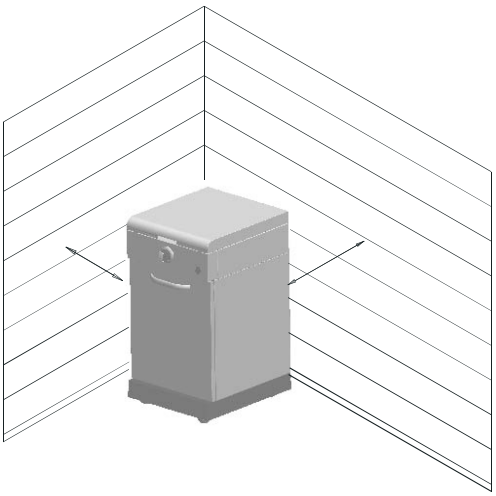

- **Apartment Dwellers:**

  Check with management to learn the requirements and fire codes for using an LP gas grill in your apartment complex. If allowed, use outside on the ground floor with a three (3) foot clearance from walls or rails. Do not use on or under balconies.
- **NEVER attempt to light burner with lid closed. A buildup of non-ignited gas inside a closed grill is hazardous.**
- **Never operate grill with LP cylinder out of correct position specified in assembly instructions.**
- **Always close LP cylinder valve and remove coupling nut before moving LP cylinder from specified operation position.**

Safety Tips

- ▲ Before opening LP cylinder valve, check the coupling nut for tightness.
- ▲ When grill is not in use, turn off all control knobs and LP cylinder valve.
- ▲ Never move grill while in operation or still hot.
- ▲ Use long-handled barbecue utensils and oven mitts to avoid burns and splatters.
- ▲ Maximum load for sideburner and side shelf is 10 lbs.
- ▲ The grease tray **must** be inserted into grill and emptied after each use. Do not remove grease tray until grill has completely cooled.
- ▲ Clean grill often, preferably after each cookout. If a bristle brush is used to clean any of the grill cooking surfaces, ensure no loose bristles remain on cooking surfaces prior to grilling. It is not recommended to clean cooking surfaces while grill is hot.
- ▲ If you notice grease or other hot material dripping from grill onto valve, hose or regulator, turn off gas supply at once. Determine the cause, correct it, then clean and inspect valve, hose and regulator before continuing. Perform a leak test.
- ▲ Keep ventilation openings in cylinder enclosure (grill cart) free and clear of debris.
- ▲ Do not store objects or materials inside the grill cart enclosure that would block the flow of combustion air to the underside of either the control panel or the firebox bowl.
- ▲ The regulator may make a humming or whistling noise during operation. This will not affect safety or use of grill.
- ▲ If you have a grill problem see the *"Troubleshooting Section"*.
- ▲ If the regulator frosts, turn off grill and LP cylinder valve immediately. This indicates a problem with the cylinder and it should not be used on any product. Return to supplier!

Griddle Burner Ignitor Lighting

▲ **Do not lean over griddle while lighting.**

1. Turn burner control valve to the ○ (OFF) position.
2. Turn **ON** gas at LP cylinder.
3. Open lid and leave open.
4. Turn the main burner control valve knob to the position .
5. Push and hold **ELECTRONIC IGNITOR** button the burner lights. Verify burner flame through match lighting hole.
6. If Ignition does not occur in 5 seconds, turn the burner controls to the ○ (OFF) position, wait 5 minutes, and repeat the lighting procedure.

If ignition still not occur, follow match-lighting instructions.

WARNING: Top cover must be open when burner is in operation.

WARNING

Turn controls and gas source or tank OFF when not in use.

CAUTION

If ignition does NOT occur in 5 seconds, turn the burner controls OFF, wait 5 minutes and repeat the lighting procedure. If the burner does not ignite with the valve open, gas will continue to flow out of the burner and could accidently ignite with risk of injury.

Griddle Burner Match-Lighting

▲ **Do not lean over grill while lighting.**

1. Turn burner control valve to the ○ **(OFF)** position.

2. Open lid and leave open. Turn **ON** gas at LP cylinder.

3. Place match into match holder (inside door.) Light match, place into match lighting opening.

4. Push in and burner knob to 🔥 position. Be sure burner lights and stays lit. Verify burner flame through match light opening.

5. If ignition does NOT occur in 5 seconds, turn the burner control knob to ○ (OFF) position, wait 5 minutes, and repeat the match lighting procedure.

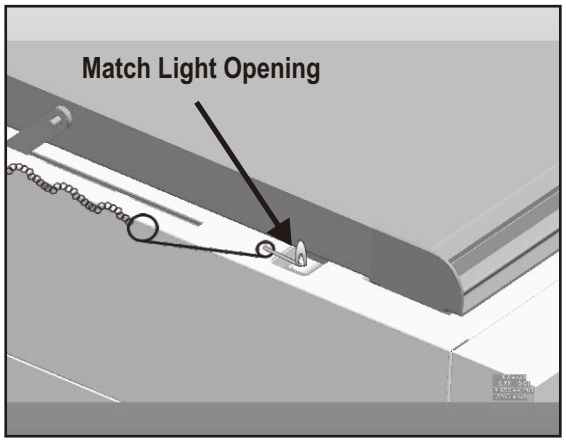

Stove Top burner Ignitor Lighting

▲ **Do not lean over grill while lighting.**

1. Turn all burner control valve to the ○ **(OFF)** position

2. Open lid and leave open. Turn **ON** gas at LP cylinder.

3. Turn burner knob to the 🔥 **(HIGH)** position, push and hold the ELECTRONIC IGNITOR button.

4. Once burner has ignited, turn knob to desired setting.

5. If burner does not light, turn knob to the ○ **(OFF)** position, wait 5 minutes, then repeat lighting procedure.

WARNING: Top cover must be open when burner is in operation.

Stove Top burner Match Lighting

1. Turn all burner control valves to the ○ **(OFF)** position.

2. Open lid and leave open. Turn **ON** gas at LP cylinder.

3. Place match into match holder (inside door.) Light match, place match near burner.

4. Turn burner knob to the 🔥 **(HIGH)** position, Be sure burner lights and stays lit.

5. If burner does not light, turn knob to the ○ **(OFF)** position, wait 5 minutes, then repeat lighting procedure.

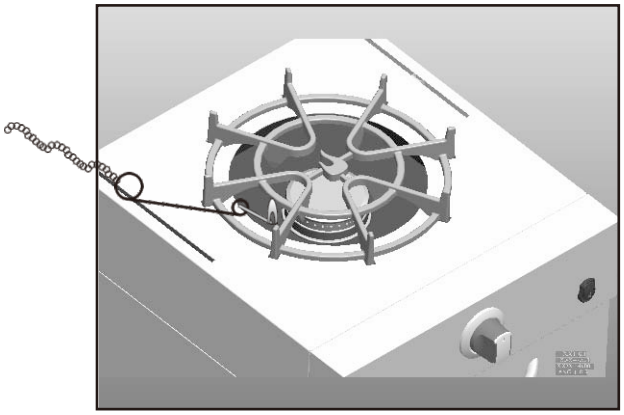

Burner Flame Check

- Remove cooking grates and troughs. Light burners, rotate knobs from the **HI** position to the **LOW** position. You should see a smaller flame in the **LOW** position than seen on the **HI** position. Perform burner flame check on sideburner, also. Always check flame prior to each use. If only low flame is seen refer to "Sudden drop or low flame" in the *Troubleshooting Section*.

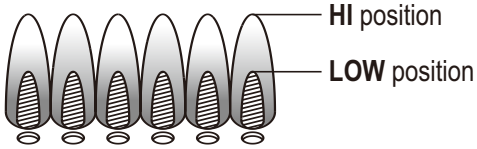

Turning Griddle / Stove Top Off

- Turn all knobs to the **OFF** position. Turn LP cylinder off by turning hand-wheel clockwise to a full stop.

Ignitor Check

- **Turn gas OFF at LP cylinder.** Press and hold electronic ignitor button. "Click" should be heard and spark seen each time between each collector box or burner and electrode. See *"Troubleshooting"* if no click or spark.

Valve Check

- **Important: Make sure gas is OFF at LP cylinder before checking valves**. Knobs lock in **OFF** position. To check valves, first push in knobs and release, knobs should spring back. If knobs do not spring back, replace valve assembly before using grill. Turn knobs to **LOW** position then turn back to **OFF** position. Valves should turn smoothly.

Hose Check

- Before each use, check to see if hoses are cut or worn. Replace damaged hoses before using stove top. Use only valve/hose/regulator specified by manufacturer.

CAUTION

SPIDER ALERT!

SPIDER AND WEBS INSIDE BURNER



If your griddle/stove top is getting hard to light or the flame is weak, check and clean the venturis and burners.

Spiders or small insects are known to create "flashback" problems by building nests and laying eggs in the barbeque's venturi or burner obstructing the flow of gas. The backed-up gas can ignite behind the control panel. This flashback can damage your barbeque and cause injury. To prevent flashbacks and ensure good performance, the burner and venturi tube assembly should be removed and cleaned whenever the barbeque has been idle for an extended period of time.

General Griddle / Stove Top Burner Cleaning

- Do not mistake brown or black accumulation of grease and smoke for paint. Interiors of gas grills are not painted at the factory **(and should never be painted)**. Apply a strong solution of detergent and water or use a grill cleaner with scrub brush on insides of grill lid and bottom. Rinse and allow to completely air dry. **Do not apply a caustic grill/oven cleaner to painted surfaces.**
- **Plastic parts:** Wash with warm soapy water and wipe dry. ▲ Do not use citrisol, abrasive cleaners, degreasers or a concentrated grill cleaner on plastic parts. Damage to and failure of parts can result.
- **Porcelain surfaces:** Because of glass-like composition, most residue can be wiped away with baking soda/water solution or specially formulated cleaner. Use nonabrasive scouring powder for stubborn stains.
- **Painted surfaces:** Wash with mild detergent or nonabrasive cleaner and warm soapy water. Wipe dry with a soft nonabrasive cloth.
- **Stainless steel surfaces:** To maintain your grill's high quality appearance, wash with mild detergent and warm soapy water and wipe dry with a soft cloth after each use. Baked-on grease deposits may require the use of an abrasive plastic cleaning pad. Use only in direction of brushed finish to avoid damage. Do not use abrasive pad on areas with graphics.
- **Cooking surfaces:** If a bristle brush is used to clean any of the grill cooking surfaces, ensure no loose bristles remain on cooking surfaces prior to grilling. It is not recommended to clean cooking surfaces while grill is hot.

Storing Your Griddle / Stove Top Burner

- Clean cooking grate / griddle.
- Store in dry location.
- When LP cylinder is connected to stove top, store outdoors in a well ventilated space and out of reach of children.
- Cover stove top if stored outdoors. Choose from a variety of grill covers offered by manufacturer.
- Store grill indoors ONLY if LP cylinder is turned off and disconnected, removed from grill and stored outdoors.
- When removing grill from storage, follow "*Cleaning the Burner Assembly*" instructions before starting the stove top.

Cleaning the Burner Assembly

Follow these instructions to clean and/or replace parts of burner assembly or if you have trouble igniting stove top.

1. **Turn gas OFF at control knobs and LP cylinder.**
2. Remove screws that hold orifice holder with the burner venturi. **Figure A**
3. Remove cooking grate.
4. Remove wing nuts from inside cart to disengage it. **Figure B**
5. Carefully lift up the burner enough to expose the electrode wire. Detach wire from electrode underneath the burner
6. Carefully take out the burner to clean. **Figure C**
7. While cleaning, make sure that the ignitor wire is not bent or broken.

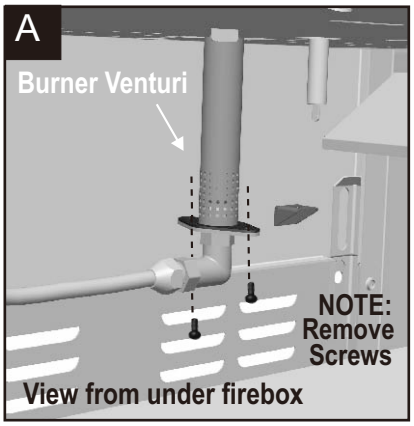

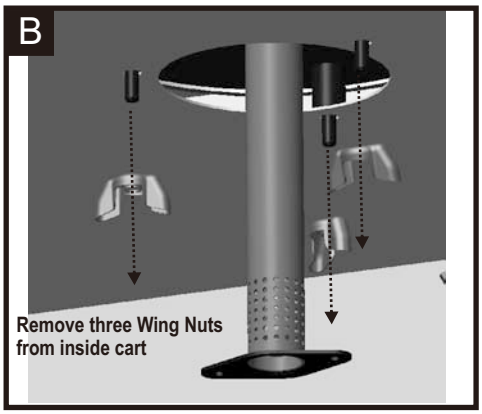

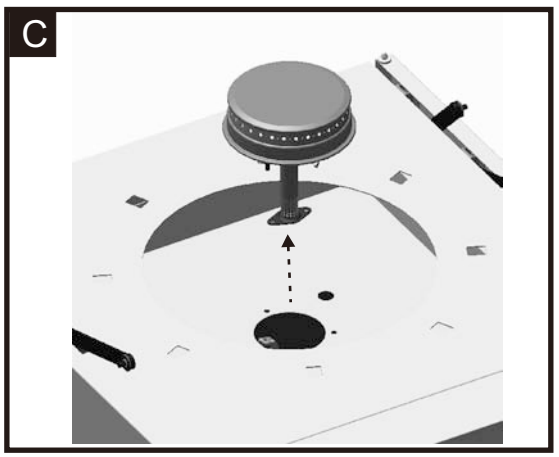

We suggest three ways to clean the burner tubes. Use the one easiest for you.

(A) Bend a stiff wire (a light weight coat hanger works well) into a small hook. Run the hook through each burner venturi tube several times.

(B) Use a narrow bottle brush with a flexible handle (do not use a brass wire brush), run the brush through each burner venturi tube several times.

(C) **Wear eye protection:** Use an air hose to force air into the burner tube and out the burner ports. Check each port to make sure air comes out each hole.

8. Wire brush entire outer surface of burner to remove food residue and dirt.
9. Clean any blocked ports with a stiff wire such as an open paper clip.
10. Check burner for damage, due to normal wear and corrosion some holes may become enlarged. If any large cracks or holes are found replace burner.

VERY IMPORTANT: Burner venturi must be attached with orifice holder properly. see illustration below.

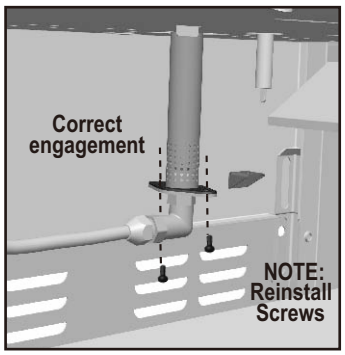

12. After cleaning put the burner back into the firebox and attach the electrode wire onto the electrode connector under the burner.
13. Place burner into position and reinstall the wing nuts.
14. Under the firebox, attach the orifice holder with the venturi tube. with the screws previous removed.
15. Replace the cooking grate.

NOTES

LIMITED WARRANTY

This warranty only applies to units purchased from an authorized retailer. Manufacturer warrants to the **original consumer-purchaser** only that this product shall be free from defects in workmanship and materials after correct assembly and under normal and reasonable home use for the periods indicated below beginning on the date of purchase*. The manufacturer reserves the right to require that defective parts be returned, postage and or freight pre-paid by the consumer for review and examination.

SCOPE OF COVERAGE	PERIOD OF COVERAGE	TYPE OF FAILURE COVERAGE
Stainless Burner	5 years from date of purchase*	PERFORATION, MANUFACTURING, AND MATERIAL DEFECTS ONLY
All Other Parts	1 year from date of purchase*	

*Note: A dated sales receipt WILL be required for warranty service.

The original consumer-purchaser will be responsible for all shipping charges for parts replaced under the terms of this limited warranty.

This limited warranty is applicable in the United States and Canada only, is only available to the original owner of the product and is not transferable. **Manufacturer requires proof of your date of purchase. Therefore, you should retain your sales slip or invoice.** Registering your product is not a substitute for proof of purchase and the manufacturer is not responsible for or required to retain proof of purchase records.

This limited warranty applies to the functionality of the product ONLY and does not cover cosmetic issues such as scratches, dents, corrosions or discoloring by heat, abrasive and chemical cleaners or any tools used in the assembly or installation of the appliance, surface rust, or the discoloration of stainless steel surfaces. **RUST is not considered a manufacturing or materials defect.**

This limited warranty will not reimburse you for the cost of any inconvenience, food, personal injury or property damage.

ITEMS MANUFACTURER WILL NOT PAY FOR:

1. Shipping cost, standard or expedited, for warranty and replacement parts
2. Service calls to your home.
3. Repairs when your product is used for other than normal, single-family household or residential use.
4. Damage, failures, or operating difficulties resulting from accident, alteration, careless handling, misuse, abuse, fire, flood, acts of God, improper installation or maintenance, installation not in accordance with electrical or plumbing codes, or use of products not approved by the manufacturer.
5. Any food loss due to product failures or operating difficulties.
6. Replacement parts or repair labor costs for units operated outside the United States or Canada.
7. Pickup and delivery of your product.
8. Repairs to parts or systems resulting from unauthorized modifications made to the product.
9. The removal and/or reinstallation of your product.

DISCLAIMER OF IMPLIED WARRANTIES and LIMITATION OF REMEDIES

Repair or replacement of defective parts is your exclusive remedy under the terms of this limited warranty. In the event of parts availability issues, the manufacturer reserves the right to substitute like or similar parts that are equally functional.

Manufacturer will not be responsible for any consequential or incidental damages arising from the breach of either this limited warranty or any applicable implied warranty, or for failure or damage resulting from acts of God, improper care and maintenance, grease fire, accident, alteration, replacement of parts by anyone other than Manufacturer, misuse, transportation, commercial use, abuse, hostile environments (inclement weather, acts of nature, animal tampering), improper installation or installation not in accordance with local codes or printed manufacturer instructions.

THIS LIMITED WARRANTY IS THE SOLE EXPRESS WARRANTY GIVEN BY THE MANUFACTURER. NO PRODUCT PERFORMANCE SPECIFICATION OR DESCRIPTION WHEREVER APPEARING IS WARRANTED BY MANUFACTURER EXCEPT TO THE EXTENT SET FORTH IN THIS LIMITED WARRANTY. ANY IMPLIED WARRANTY PROTECTION ARISING UNDER THE LAWS OF ANY STATE, INCLUDING IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE, IS HEREBY LIMITED IN DURATION TO THE DURATION OF THIS LIMITED WARRANTY.

Neither dealers nor the retail establishment selling this product has any authority to make any additional warranties or to promise remedies in addition to or inconsistent with those stated above. Manufacturer's **maximum liability**, in any event, shall not exceed the purchase price of the product paid by the original consumer.

NOTE: Some states do not allow an exclusion or limitation of incidental or consequential damages, so some of the above limitations or exclusions may not apply to you. This limited warranty gives you specific legal rights as set foth herein. You may also have other rights which vary from state to state. In the state of California only, if refinishing or replacement of the product is not commercially practicable, the retailer selling this product or the Manufacturer will refund the purchase price paid for the product, less the amount directly attributable to use by the original consumer-purchaser prior to discovery of the nonconformity. In addition, in the state of California only, you may take the product to the retail establishment selling this product in order to obtain performance under this limited warranty.

If you wish to obtain performance of any obligation under this limited warranty, you should write to:
Consumer Relations
P. O. Box 1240
Columbus, GA 31902-1240

Consumer returns will not be accepted unless a valid Return Authorization is first acquired. Authorized returns are clearly marked on the outside of the package with an RA number and the package is shipped freight/postage pre-paid. Consumer returns that do not meet these standards will be refused.

PARTS LIST

Key	Qty	Description
A	1	TOP LID
B	4	RUBBER BUMPER, ROUND
C	1	FIREBOX
D	1	BURNER
E	1	ELECTRODE, F/ BURNER
F	1	CONTROL PANEL
G	1	HOSE VALVE REGULATOR ASSEMBLY
H	1	BEZEL, F/ CONTROL KNOB
I	1	CONTROL KNOB
J	1	IGNITER SWITCH MODULE
K	2	TOP LID HINGE, STRAIGHT
L	2	TOP LID HINGE, BENT
M	1	GRATE
N	1	LEFT SIDE CART PANEL
O	1	DOOR MAGNET ASSEMBLY
P	2	MAGNET ASSEMBLY
Q	1	RIGHT SIDE CART PANEL
R	1	BOTTOM SHELF
S	1	TANK SCREW
T	2	CASTER, LOCKING
U	2	CASTER, FIXED
V	1	CART LOWER BACK PANEL
W	1	FRONT BRACE
X	1	DOOR, NO HANDLE
Y	1	HANDLE, F/ DOOR
Z	1	MATCH HOLDER
AA	1	ELECTRONIC IGNITION MODULE
BB	1	CAP F/ EI MODULE
CC	1	TANK EXCLUSION

NOT Pictured

…	1	NATURAL GAS ORIFICE KIT
…	1	CASTER PIN
…	1	HARDWARE PACK
…	1	ASSEMBLY MANUAL, ENGLISH
…	1	ASSEMBLY MANUAL, SPANISH

NOTE: Some grill parts shown in the assembly steps may differ slightly in appearance from those on your particular grill model. However, the method of assembly remains the same.

PARTS DIAGRAM

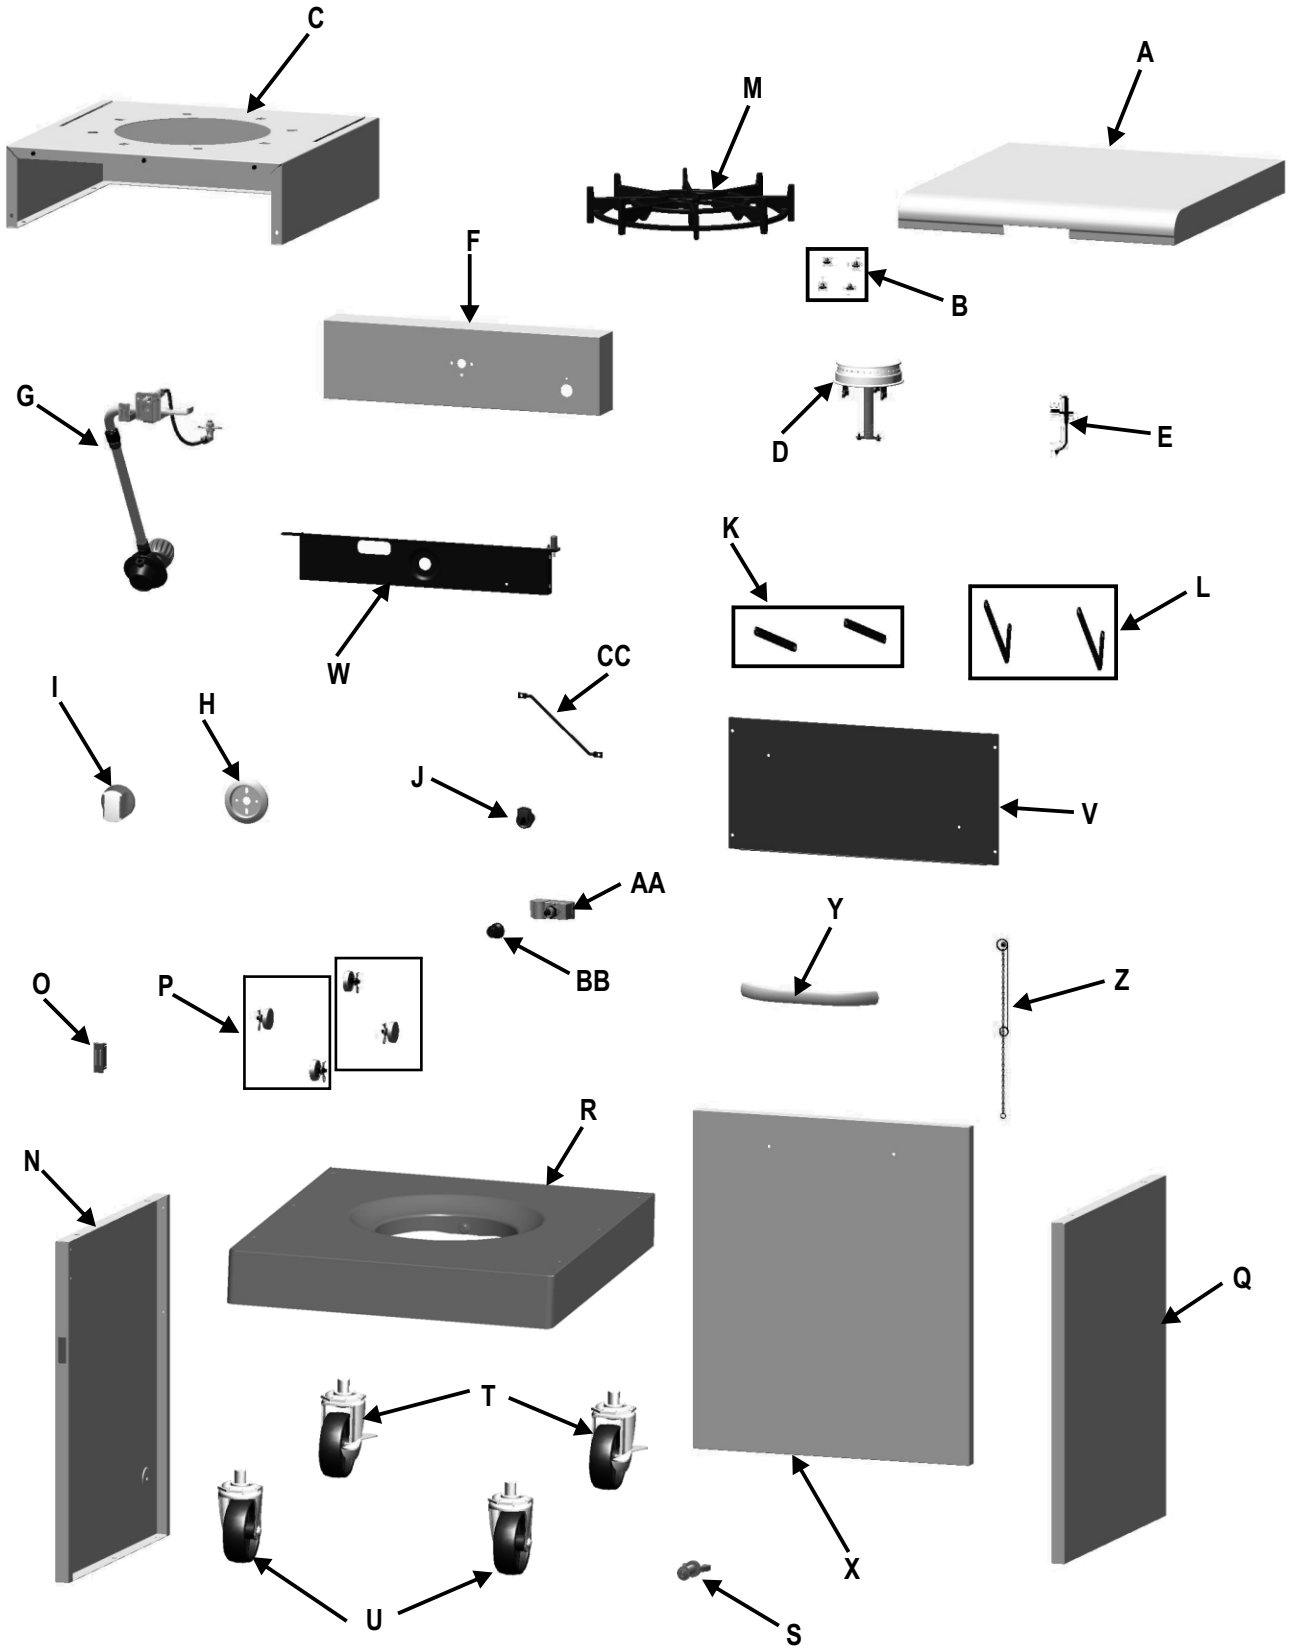

ASSEMBLY

1 Place bottom shelf upside down. Insert Caster Pin into the caster mounting plate to lock it in place, shown **A**. Spin the casters clockwise into the threads on the bottom shelf until secure. Remove the Caster Pin and repeat for remaining casters. Make sure the two locking casters are secured at the rear and the non-locking casters are secured at the front. After all 4 casters are secured remove the Caster Pin and save for future maintenance.

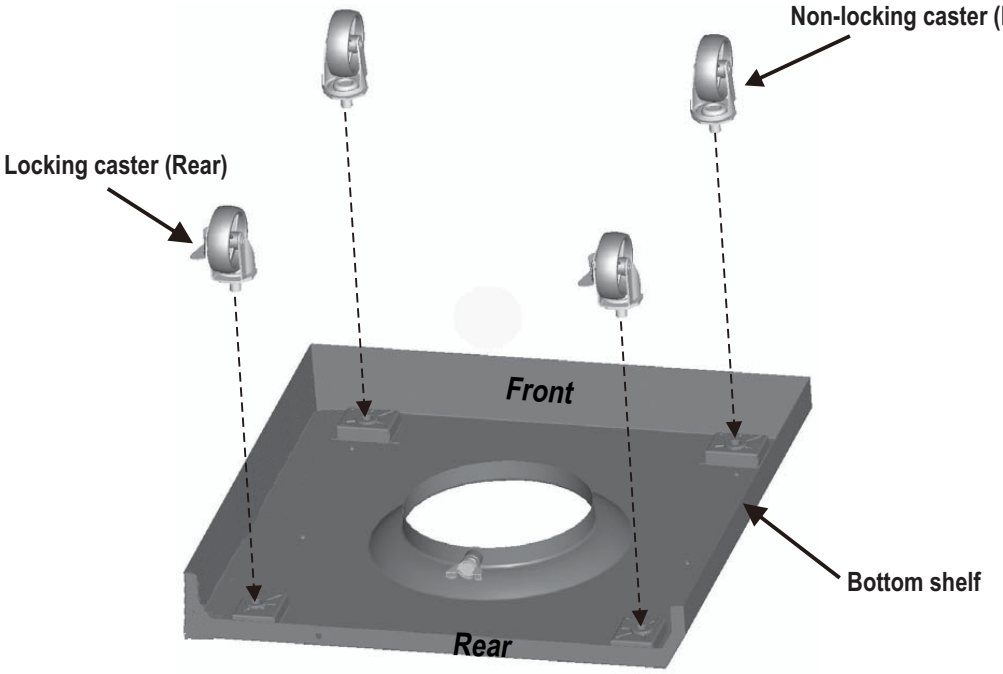

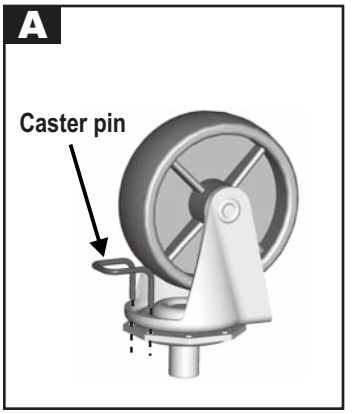

2 Attach side panels to bottom shelf using three **1/4-20x1/2"** screws per panel.
IMPORTANT: Panel with magnet must be on Left side of bottom shelf.

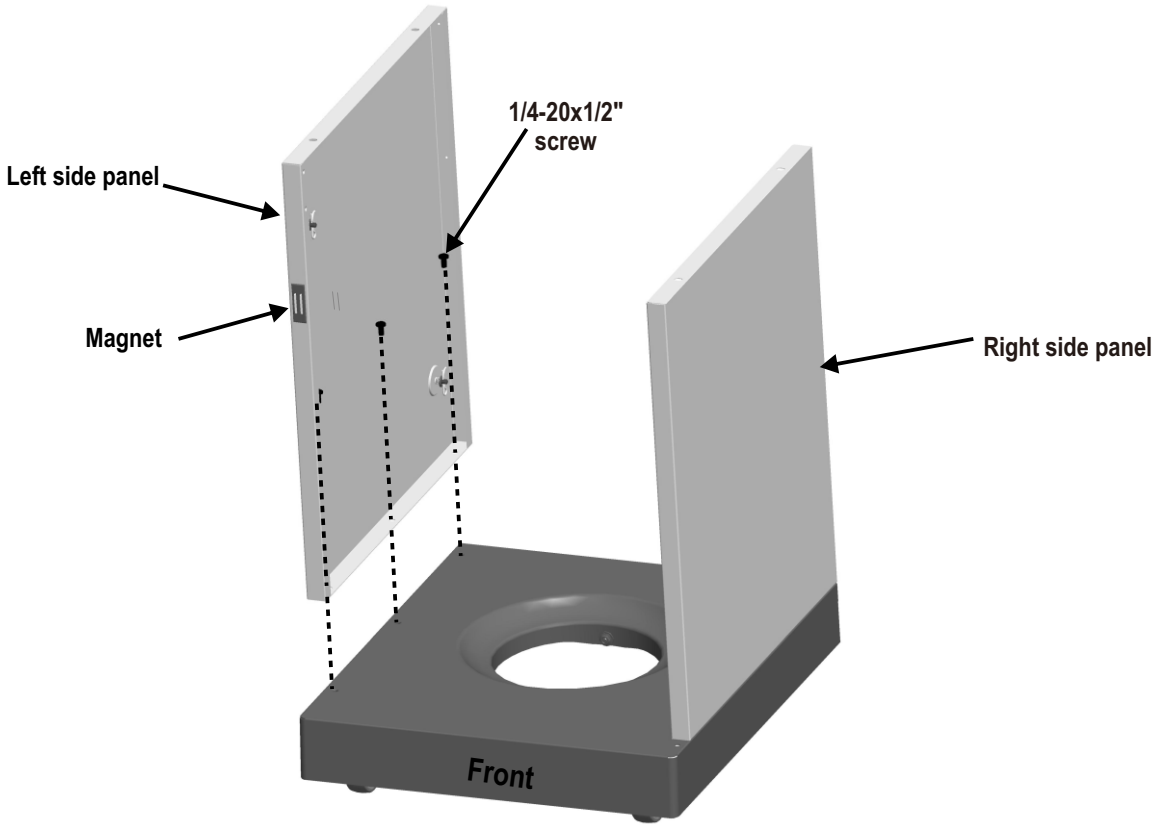

3 Insert front brace between cart panels. Make sure door hinge pin is on the top side and facing the front. Secure front brace using two **1/4-20x1/2"** screws on each side.

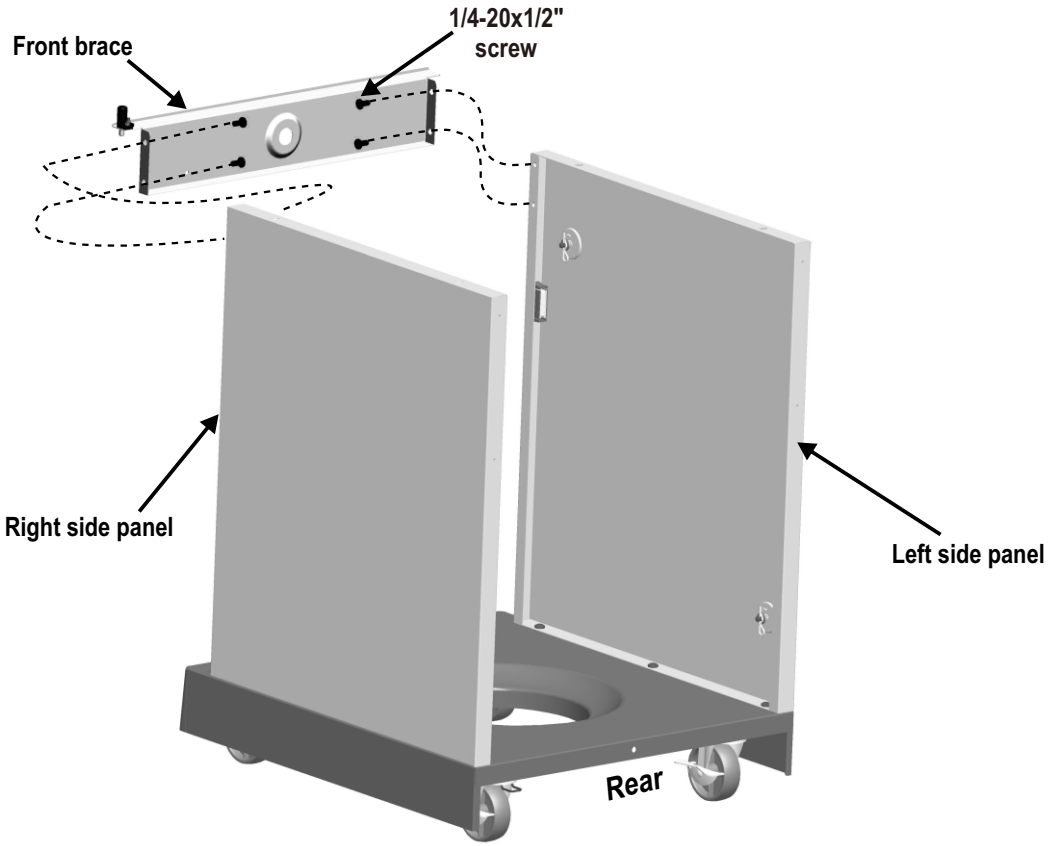

4 **This step requires two people to lift and position stove top onto cart.** Carefully lower the stove top onto the cart, Attach stove top to cart with four 1/4-20x1/2" screws. **Make sure the regulator and ignitor wires are hanging inside the cart.**

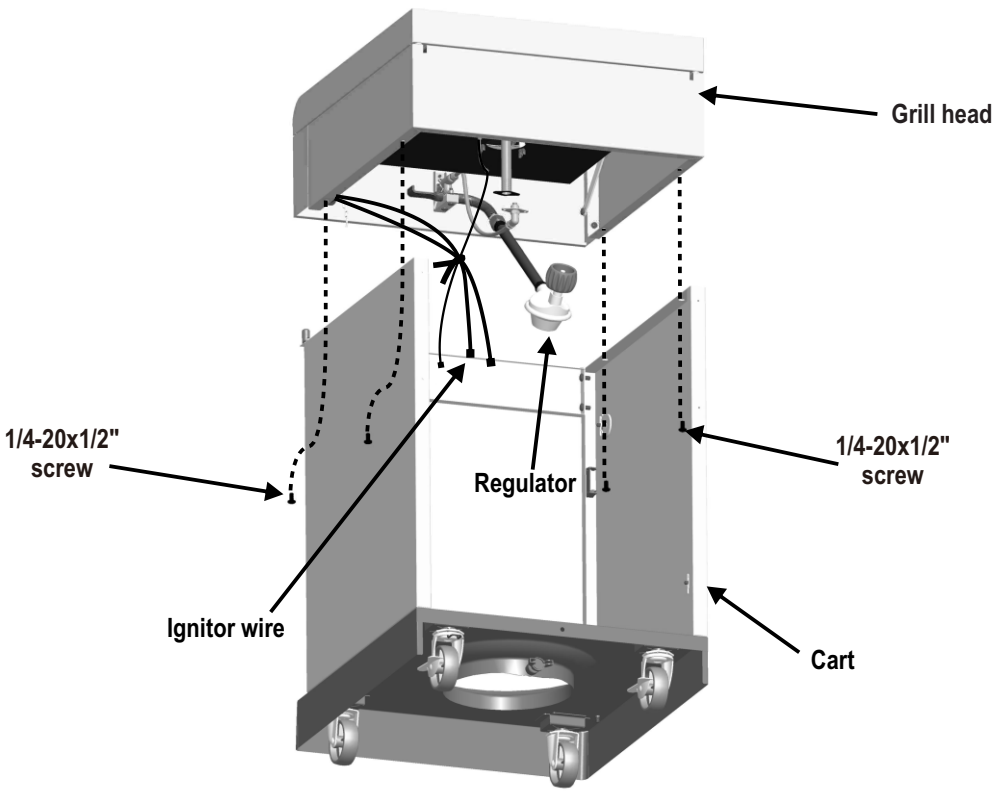

5 Connect the wire from burner electrode into the back of Electronic ignition module, positions 1. Connect the two wires [(a) and (b)] from switch wiring harness into the back of Electronic ignition module.

NOTE: Switch terminals are larger than electrode terminal and should only be installed in location shown as (a),(b).

Release cap and nut from electronic ignition module. Attach Electronic ignition module to front brace with the nut. Insert AAA battery into module, negative (-) end first. Replace the cap.

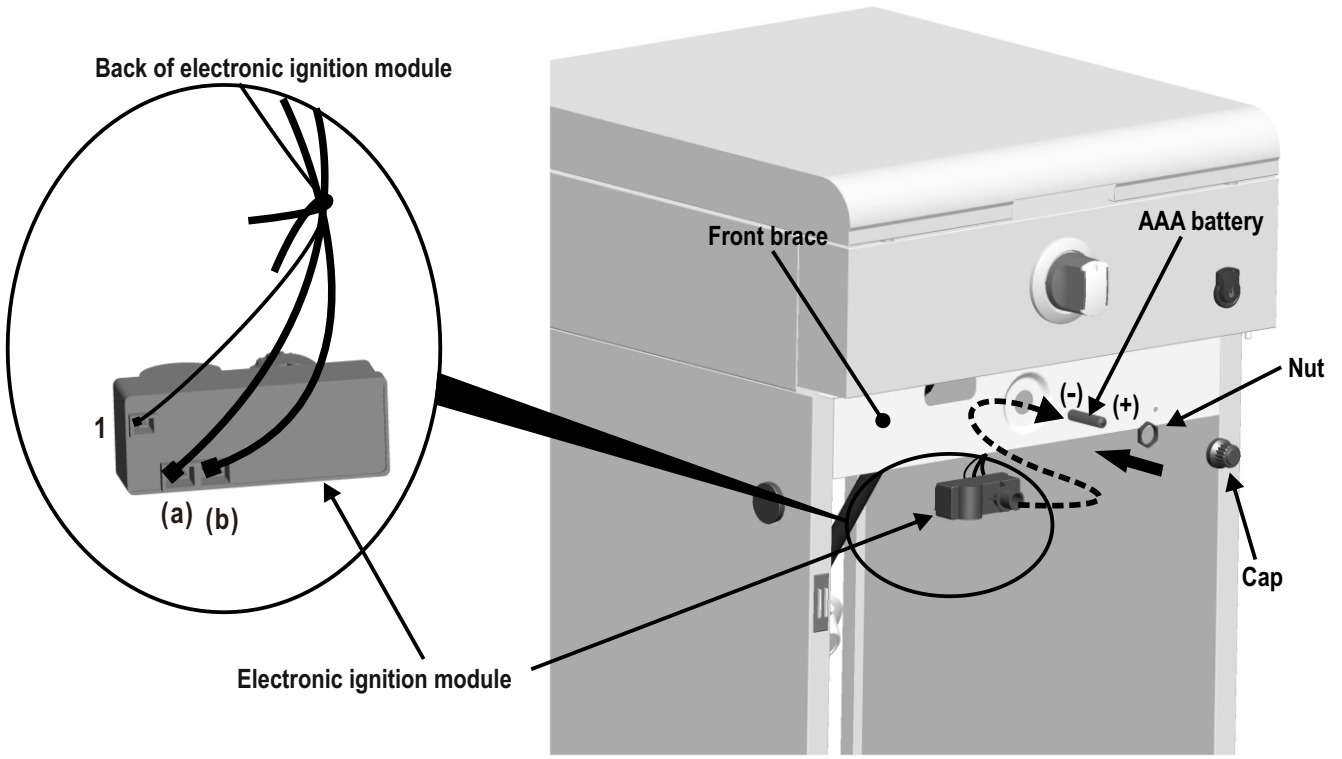

6 On back of the stove top, attach back panel to cart side panels using four **#8x3/8"** self-tapping screws.

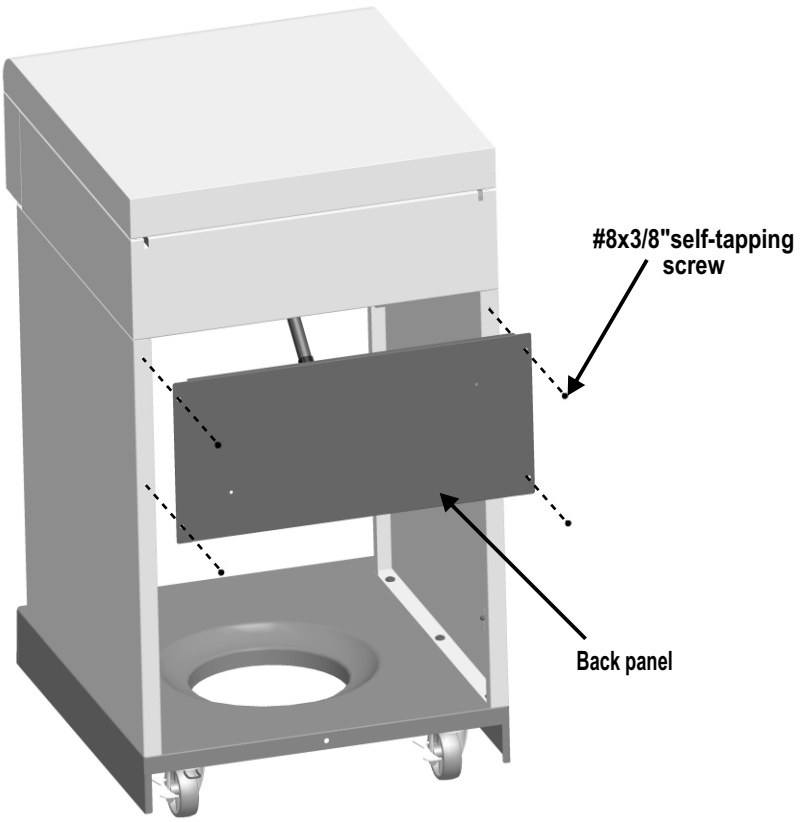

7 Attach tank exclusion wire to back panel and front brace using two **#8-32x3/8"** screws and **#8-32** nuts.

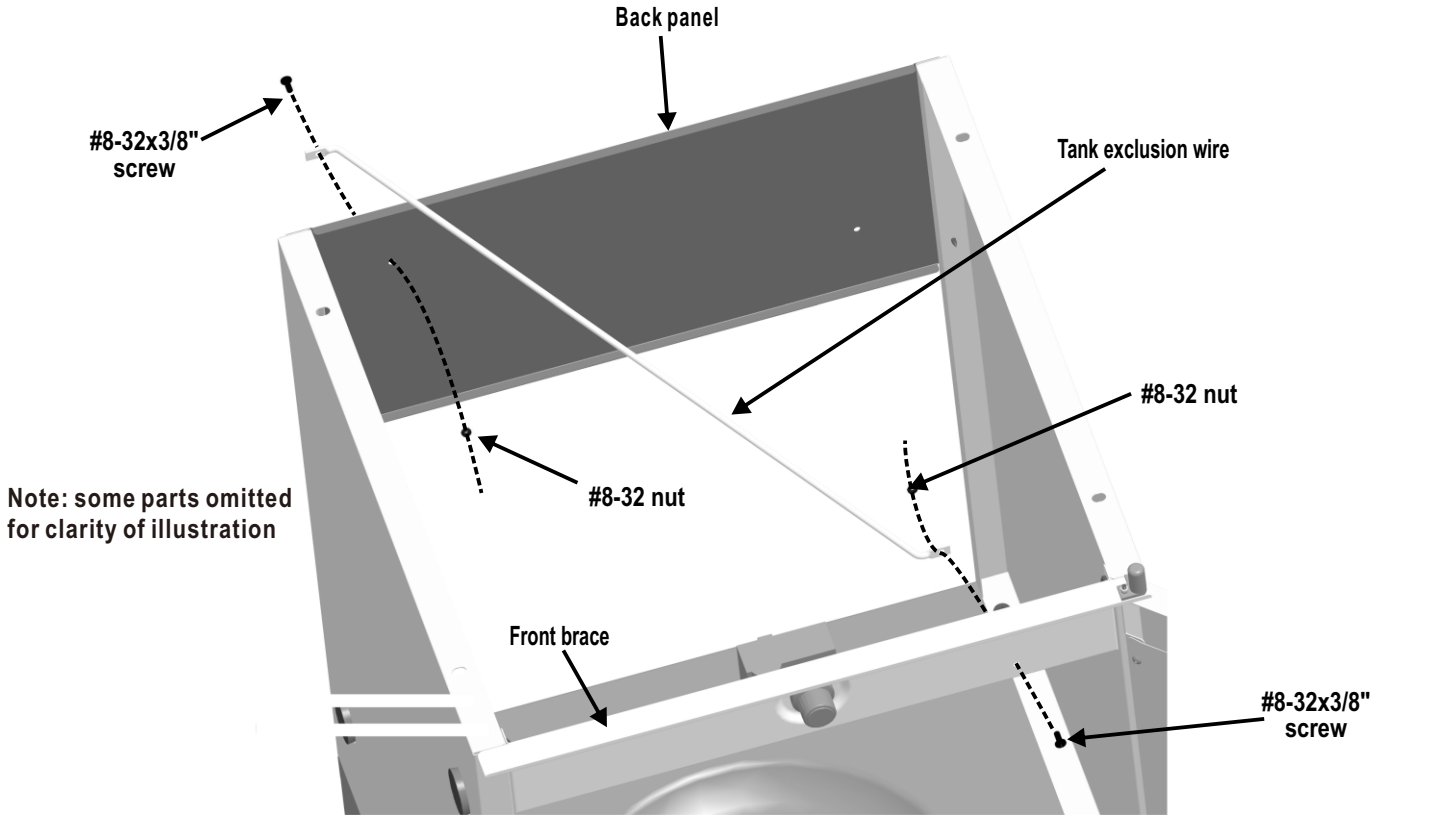

8 Attach door handle to door using two **#10-24x3/8"** screws.

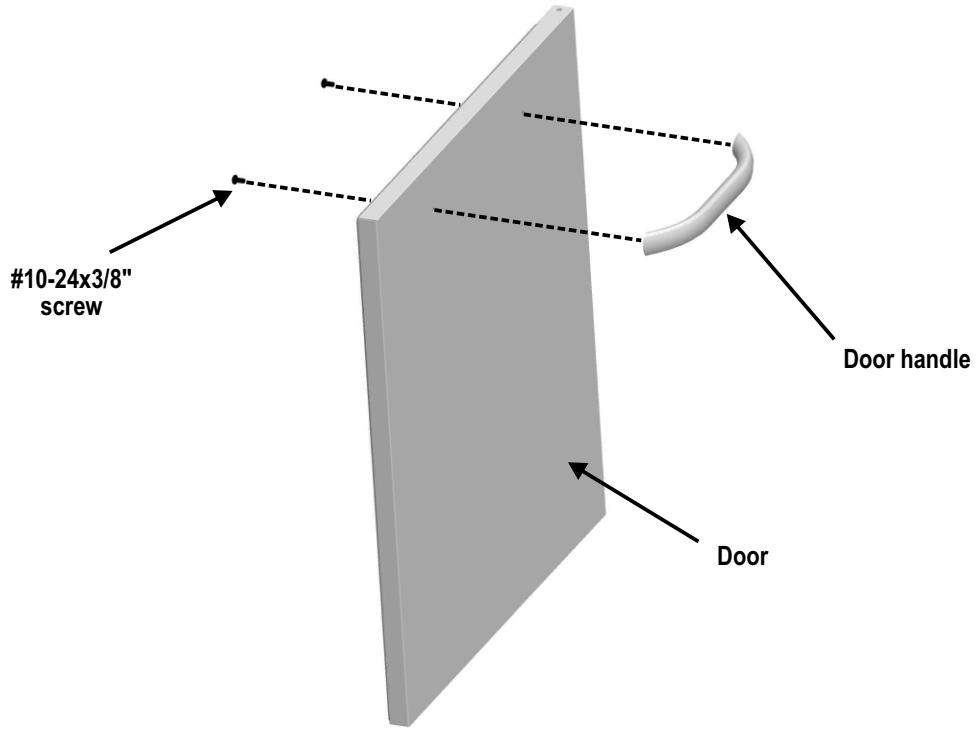

9 Place cooking grate on the stove top as shown, align grate legs into matching slots in the stove top.

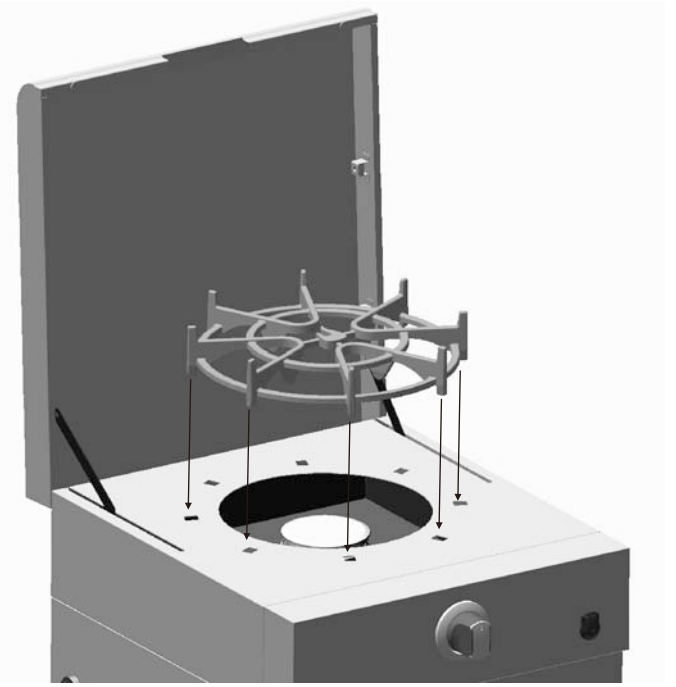

10 Insert hinge pin on bottom of door into hole in bottom shelf. Press upper hinge pin in front brace, align hinge hole on top of door and release hinge pin into door.

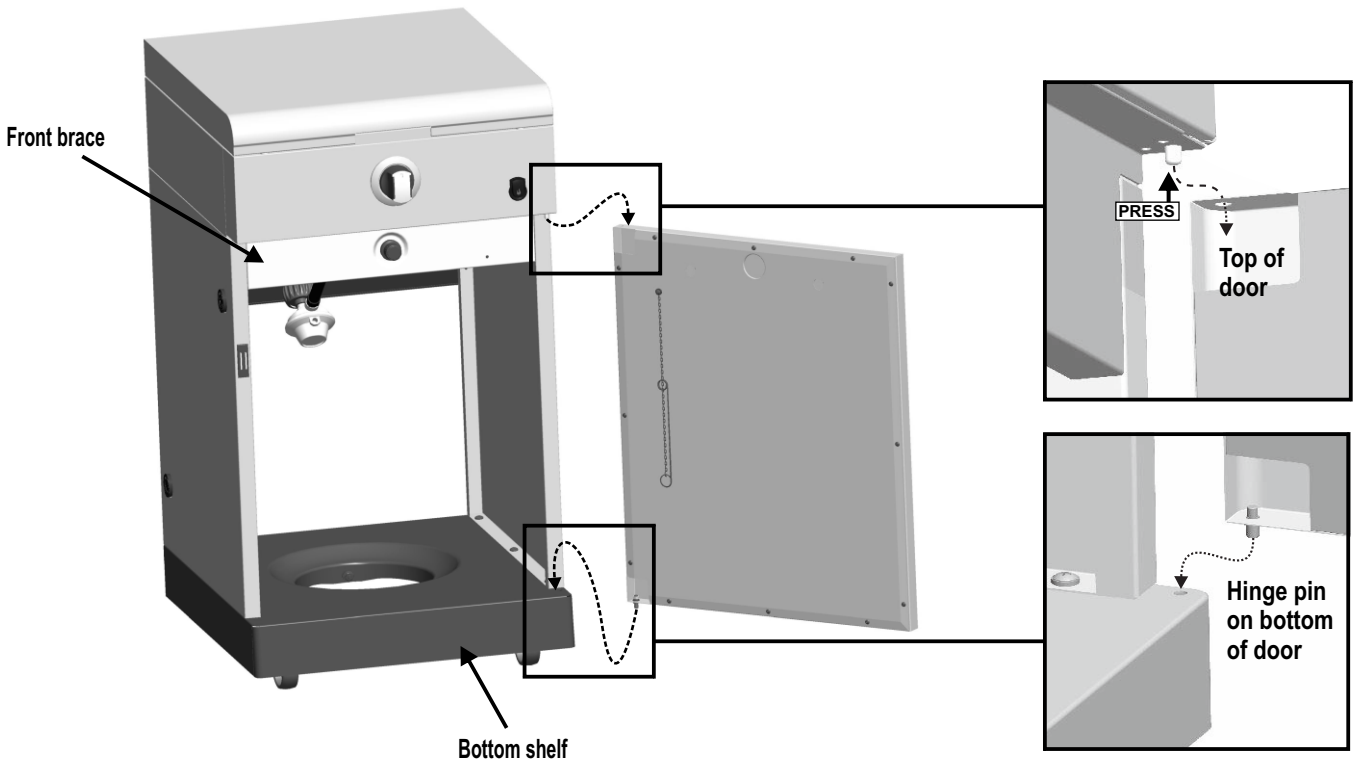

11

LP CYLINDER IS SOLD SEPARATELY. Fill and leak check the cylinder before attaching to grill and regulator (see Use & Care section). Once cylinder has been filled and leak checked, place cylinder into hole in bottom shelf. **Make sure cylinder valve is facing front of grill. Secure cylinder with cylinder screw under bottom shelf.**
See Use & Care section of this manual to perform the burner Flame Check and for **important safety instructions before using.**

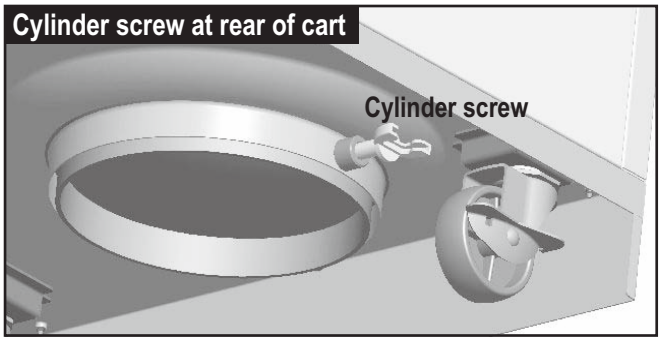

Always keep LP cylinders in upright position during use, transport and storage.

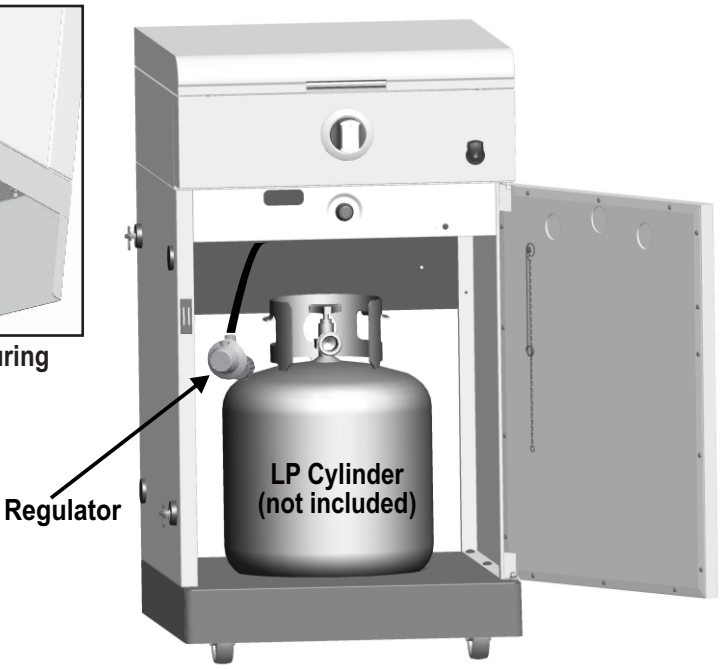

CAUTION

Cylinder valve must face to front of cart once tank is attached. Failure to install cylinder correctly may allow gas hose to be damaged in operation, resulting in the risk of fire.

12 OPTIONAL Attaching the Griddle Cart to your full size Commercial Series grill.

1. Remove the RH side shelf and brackets from your Grill:

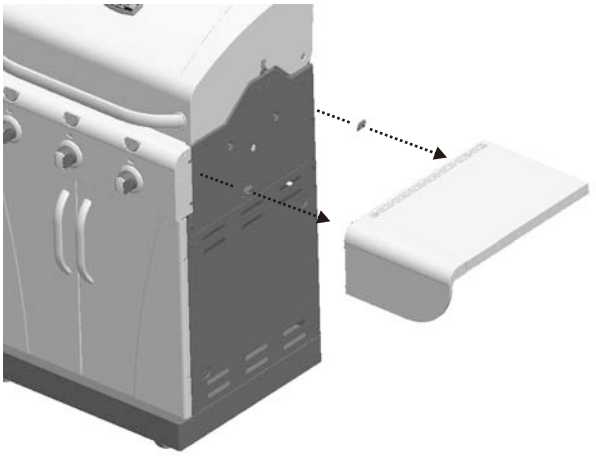

2. Attach the magnet assemblies to your grill:

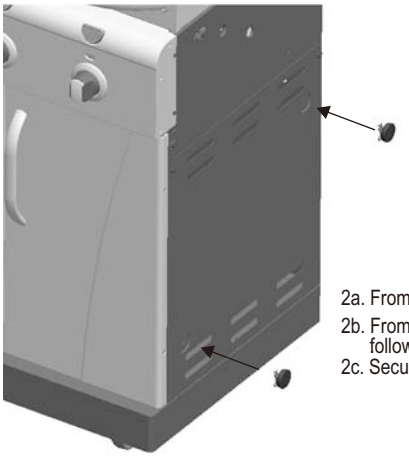



2a. From outside the grill, insert the magnet shaft.
2b. From inside the grill, place the spring on the shaft, followed by the washer.
2c. Secure the magnet assembly with the hairpin clip.

3. Attach the Griddle Cart to you Grill.

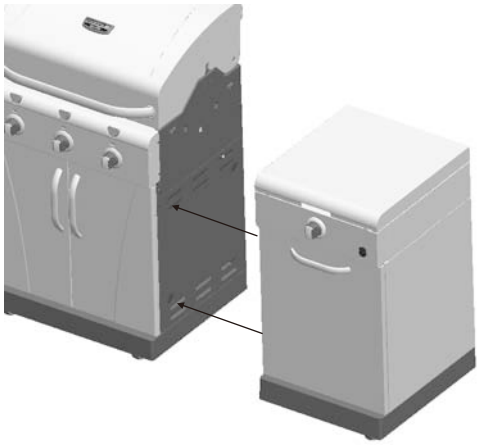

4. Complete!

Consumer must purchase Natural Gas Conversion Kit 4984619 to convert this grill to natural gas. Use the following instructions instead of instructions found in conversion kit

Main Burner Conversion

1 Make sure all Control Knobs are in the OFF position, LP Tank Valve is closed, Tank is disconnected from Regulator and removed from Grill.
Remove cooking grates or griddle plate.

Your grill may differ from illustration shown. This portion of the manual covers a variety of grill styles. Use pictures as reference only. Not all steps will apply to your grill conversion.

2 Remove screws that hold orifice holder with the burner venturi.

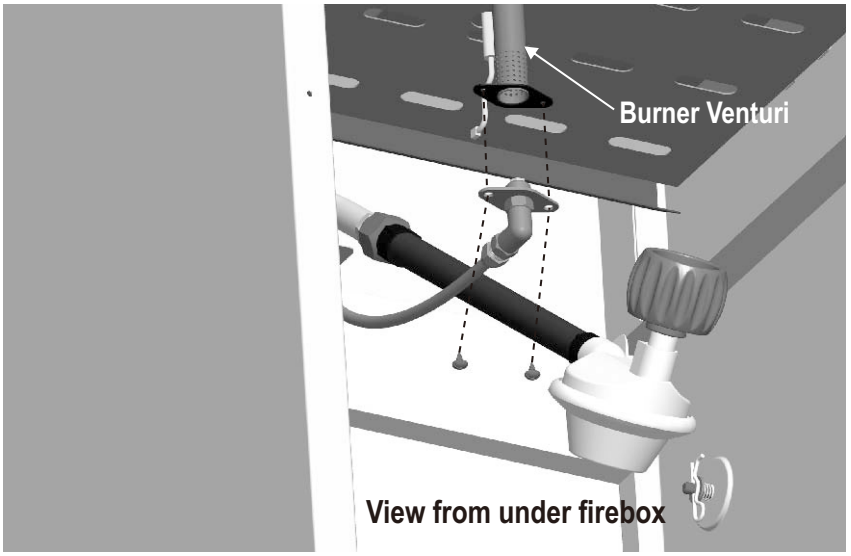

3 Unscrew Orifice from Orifice Holder using the Orifice Removal Tool provided with Kit. Save removed Orifice and Orifice Removal Tool for converting back to LP Tank Gas. These grill valve are designed to work with Natural Gas once Orifice is removed. Replace Main Burner LP Orifice with Natural Gas Orifice supplied in hardware pack.

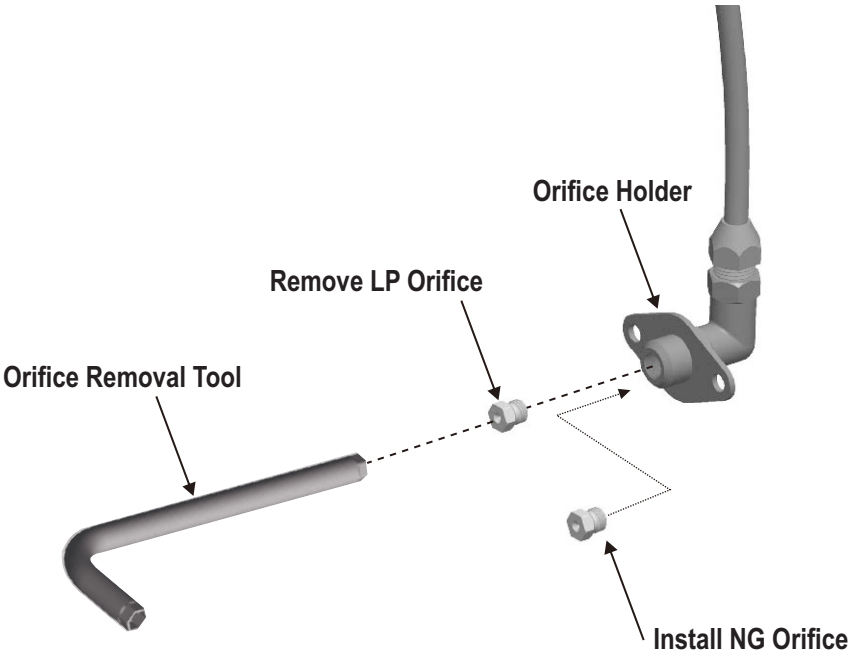

4 Pull the Burner Control Knob off of Valve Stem.
Remove Screws and Washers that secure the Bezel to the Control Panel. Save removed Bezel for converting back to LP Tank Gas.
Install new Natural Gas Bezel provided with Kit (see illustration below) in place of old Bezel, on Control Panel and secure using previously removed Screws and Washers. Assure proper alignment with Control Knob before fully tightening.
Note: The new bezel will limit the rotation of the Control Knob in order to properly control gas flow to your grill.
Press Control Knob back onto Valve Stem. Make adjustments to Bezel for free movement of Control Knob.

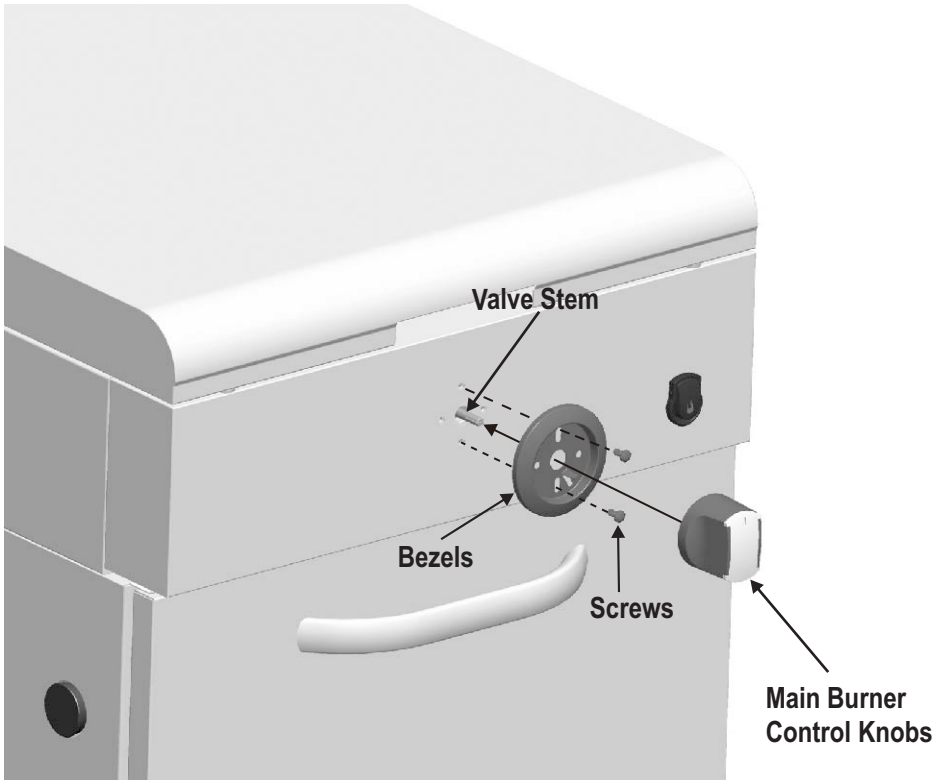

Install bezel with "OFF" at top

5 Under the firebox, attach the orifice holder with the venturi tube with the screws previous removed.

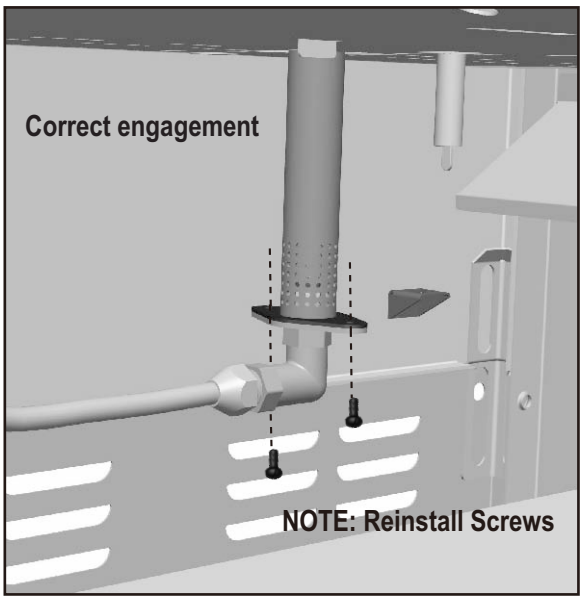

Natural Gas Hose Conversion

6 Using a wrench, not provided, remove LP Regulator Hose Assembly from Manifold Connection. Save removed LP Manifold Connection for converting back to LP Tank Gas.
Your Grill may differ from illustration shown.

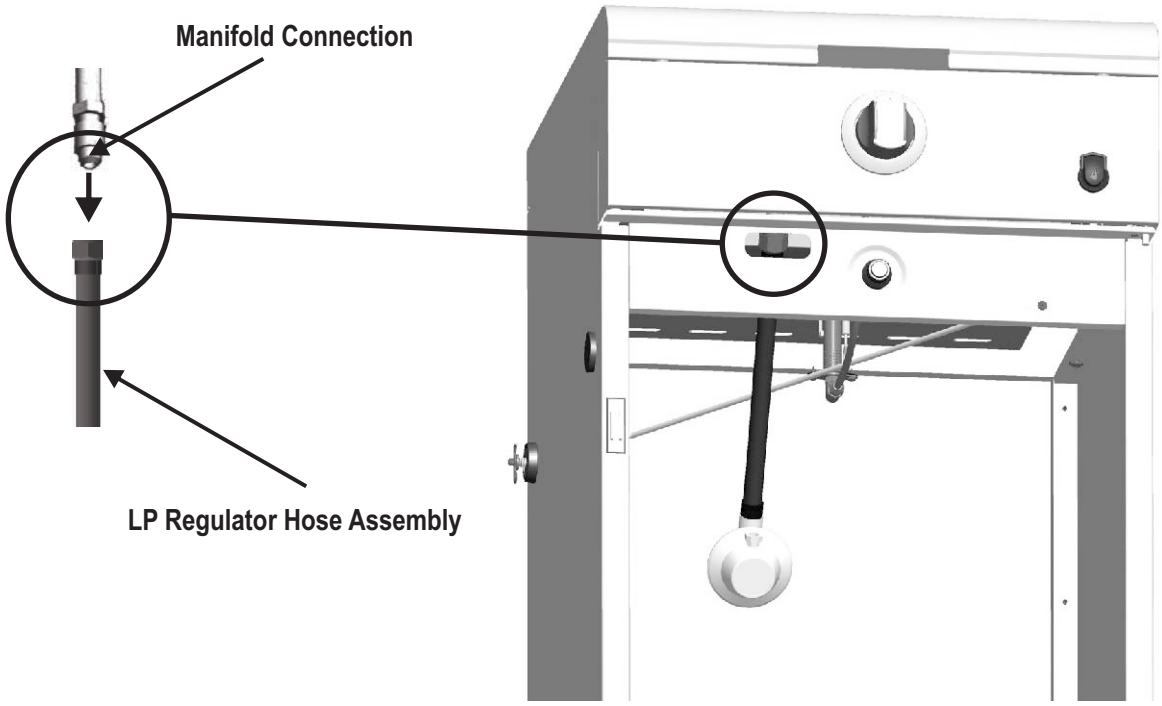

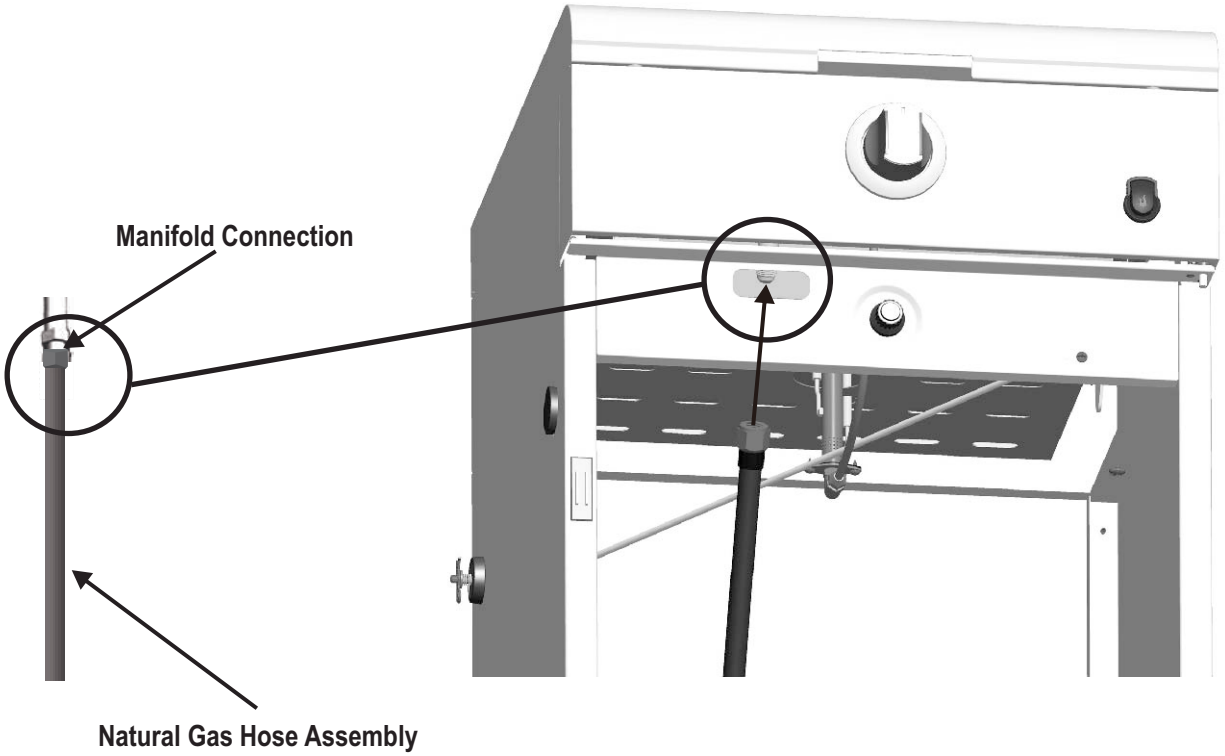

WARNING

Do not use hard metal piping of any kind to connect this type of grill to natural gas source. Use only hose specified by manufacturer. Using hard metal piping or convoluted metal tubing is an unsafe practice. Movement of the grill can cause breakage of metal pipe.

Connecting Your Grill to the Natural Gas Source.

1. A professionally-installed shut-off valve between the supply piping and the socket is recommended, but not required, by the National Fuel Gas Code. Socket connection must be made outdoors.

2. Coat the gas supply pipe nipple with gas resistant pipe dope or approved teflon tape. Screw socket onto gas supply pipe (house gas source) as shown in **Figure A** below, and wrench-tighten.

CAUTION

The quick disconnect socket should never be connected to the grill. Direction of gas flow is indicated on the socket.

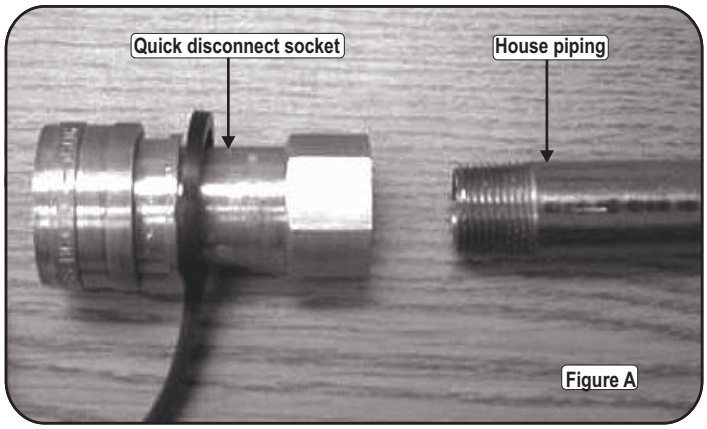

3. Pull back the sleeve on the quick disconnect socket and insert the unattached end of the gas hose into the socket. Release the sleeve and continue pushing the hose into the socket until the sleeve snaps into the locked position. See **Figure B**.

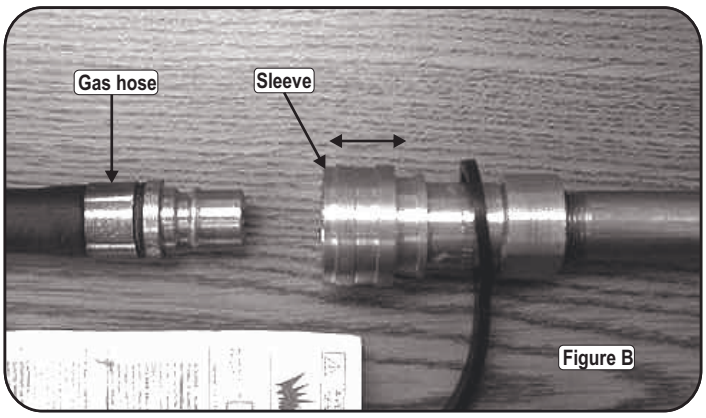

4. When the quick disconnect socket and the gas hose are connected, a valve in the socket opens automatically to permit full gas flow. When the gas hose is disconnected, the valve in the socket instantly and positively shuts off the flow of gas. Because the valve in the socket positively shuts off the flow of gas, the grill can be disconnected from the gas source by disconnecting the gas hose from the quick disconnect socket. The socket should be left attached to the gas source (house piping). **Figure C**, below, shows properly connected hose and socket.

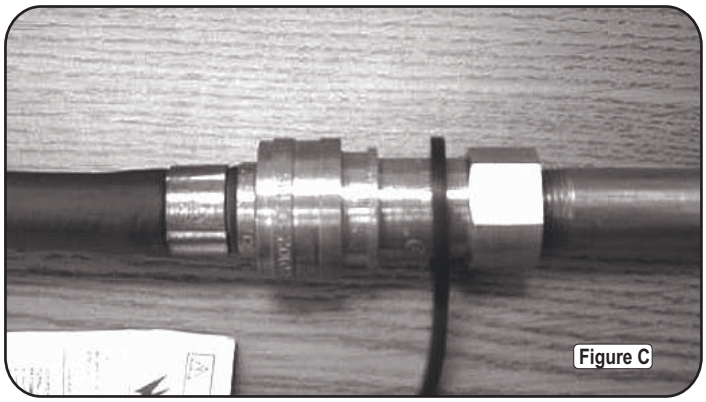

With proper assembly, the gas hose cannot be removed without pushing the quick disconnect sleeve back. To disconnect, push sleeve back and pull plug out of sleeve (this automatically shuts off gas).

Please Note: Hose and assembly are C.S.A. listed for natural gas, manufactured gas, mixed gas and for liquefied petroleum and for LP Gas-Air mixtures on basis of 0.64 specific gravity for 1000 BTU's per cubic foot of gas at 0.3 in. water column pressure drop. Only ANSI Z21.54 approved hoses should be used with this grill.

The appliance and its individual shut off valve must be disconnected from the gas supply piping system during any pressure testing on that system at test pressures in excess of 1/2 psig (3.5kPa).

The appliance must be isolated from the gas supply piping system by closing its individual manual shutoff valve during any pressure testing of the gas supply piping system at test pressures equal to or less than 1/2 psi (3.5kPa).

DANGER: If a gas leak cannot be stopped, or a fire occurs due to gas leakage, call the fire department.

Emergencies	Possible Cause	Prevention/Solution
Gas leaking from cracked/cut/burned hose.	• Damaged hose.	• Turn off gas at LP cylinder or at source on natural gas systems. If anything but burned, replace valve/hose/regulator. If burned, discontinue use of product until a plumber has investigated cause and corrections are made.
Gas leaking from LP cylinder.	• Mechanical failure due to rusting or mishandling.	• Replace LP cylinder.
Gas leaking from LP cylinder valve.	• Failure of cylinder valve from mishandling or mechanical failure.	• Turn off LP cylinder valve. Return LP cylinder to gas supplier.
Gas leaking between LP cylinder and regulator connection.	• Improper installation, connection not tight, failure of rubber seal.	• Turn off LP cylinder valve. Remove regulator from cylinder and visually inspect rubber seal for damage. See LP Cylinder Leak Test and Connecting Regulator to the LP Cylinder.
Fire coming through control panel.	• Fire in burner tube section of burner due to blockage.	• Turn off control knobs and LP cylinder valve. Leave lid open to allow flames to die down. After fire is out and grill is cold, remove burner and inspect for spider nests or rust. See Natural Hazard and Cleaning the Burner Assembly pages.
Grease fire or continuous excessive flames above cooking surface.	• Too much grease buildup in burner area.	• Turn off control knobs and LP cylinder valve. Leave lid open to allow flames to die down. After cooling, clean food particles and excess grease from inside firebox area, grease tray, and other surfaces.

Troubleshooting

Problem	Possible Cause	Prevention/Solution
Burner(s) will not light using ignitor. (See Electronic Ignition Troubleshooting also) *Continued on next page.*	**GAS ISSUES:**	
	• Trying to light wrong burner.	• See instructions on control panel and in Use and Care section.
	• Burner not engaged with control valve.	• Make sure valves are positioned inside of burner tubes.
	• Obstruction in burner.	• Ensure burner tubes are not obstructed with spider webs or other matter. See cleaning section of Use and Care.
	• No gas flow.	• Make sure LP cylinder is not empty. If LP cylinder is not empty, refer to “Sudden drop in gas flow.”
		• For a grill equipped with the AUTO-CLEAN™ feature, make sure the AUTO-CLEAN™ valve is set to “Grill”
	• Vapor lock at coupling nut to LP cylinder.	• Turn off knobs and disconnect coupling nut from LP cylinder. Reconnect and retry.
	• Coupling nut and LP cylinder valve not fully connected.	• Turn the coupling nut approximately one-half to three-quarters additional turn until solid stop. Tighten by hand only - do not use tools.
	ELECTRICAL ISSUES:	
	• Electrode cracked or broken; “sparks at crack.”	• Replace electrode(s).
	• Electrode tip not in proper position.	Main Burners: • Tip of electrode should be pointing toward gas port opening on burner. The distance should be 1/8” to 1/4”. Adjust if necessary. Sideburner: • Tip of electrode should be pointing toward gas port opening on burner. the distance should be 1/8” to 3/16”. Adjust if necessary.
	• Wire and/or electrode covered with cooking residue.	• Clean wire and/or electrode with rubbing alcohol and clean swab.
	• Wires are loose or disconnected.	• Reconnect wires or replace electrode/wire assembly.
	• Wires are shorting (sparking) between ignitor and electrode.	• Replace ignitor wire/electrode assembly.
	• Dead battery.	• Replace with a new alkaline battery.

Troubleshooting (*continued*)

Problem	Possible Cause	Prevention/Solution
Burner(s) will not light using ignitor. (See Electronic Ignition Troubleshooting also)	**ELECTRONIC IGNITION:** • No spark, no ignition noise. • No spark, some ignition noise. • Sparks, but not at electrode or at full strength.	 • See Section I of Electronic Ignition System. • See Section II of Electronic Ignition System. • See Section III of Electronic Ignition System.
Burner(s) will not match light.	• See **"GAS ISSUES:"** on previous page. • Match will not reach. • Improper method of match-lighting.	 • Use long-stem match (fireplace match). • See "Match-Lighting" section of Use and Care.
Sudden drop in gas flow or low flame.	• Out of gas. • Excess flow valve tripped. • Vapor lock at coupling nut/LP cylinder connection.	• Check for gas in LP cylinder. • Turn off knobs, wait 30 seconds and light grill. If flames are still low, turn off knobs and LP cylinder valve. Disconnect regulator. Reconnect regulator and leak-test. Turn on LP cylinder valve, wait 30 seconds and then light grill. • Turn off knobs and LP cylinder valve. Disconnect coupling nut from cylinder. Reconnect and retry.
Flames blow out.	• High or gusting winds. • Low on LP gas. • Excess flow valve tripped.	• Turn front of grill to face wind or increase flame height. • Refill LP cylinder. • Refer to "Sudden drop in gas flow" above.
Flare-up.	• Grease buildup. • Excessive fat in meat. • Excessive cooking temperature.	• Clean burners and inside of grill/firebox. • Trim fat from meat before grilling. • Adjust (lower) temperature accordingly.
Persistent grease fire.	• Grease trapped by food buildup around burner system.	• Turn knobs to OFF. Turn gas off at LP cylinder. Leave lid in position and let fire burn out. After grill cools, remove and clean all parts.
Flashback... (fire in burner tube(s)).	• Burner and/or burner tubes are blocked.	• Turn knobs to OFF. Clean burner and/or burner tubes. See burner cleaning section of Use and Care.
Unable to fill LP cylinder.	• Some dealers have older fill nozzles with worn threads.	• The worn nozzles don't have enough "bite" to engage the valve. Try a second LP dealer.
One burner does not light from other burner(s).	• Grease buildup or food particles in end(s) of carryover tube(s).	• Clean carry-over tube(s) with wire brush.
AUTO-CLEAN™ (If Equipped)	**Possible Cause**	**Prevention/Solution**
Timer does not work (Green light does not flash)	• Dead Battery • Batteries installed incorrectly. • Knob Position did not start the Clean Cycle	• Replace batteries • Install batteries correctly. • Push Knob in to start the clean cycle. (Green LED should begin to flash)
No LED's will illuminate	• Dead Battery	• Replace batteries
Red LED next to battery symbol is illuminated	• Low Battery Strength	• Prepare to replace batteries (NOTE: Clean cycle will operate with a weak battery.

Troubleshooting - Electronic Ignition

Problem (Ignition)	Possible Cause	Check Procedure	Prevention/Solution
SECTION I No sparks appear at any electrodes when Electronic Ignition Button is pressed; **no noise** can be heard from spark module.	• Battery not installed properly.	• Check battery orientation.	• Install battery (make sure that "+" and "–" connectors are oriented correctly, with "+" end up and "–" end down.)
	• Dead battery.	• Has battery been used previously?	• Replace battery with new alkaline battery.
	• Button assembly not installed properly.	• Check to insure threads are properly engaged. Button should travel up and down without binding.	• Unscrew button cap assembly and reinstall, making sure threads are aligned and engaged fully.
	• Faulty spark module.	• If no sparks are generated with new battery and good wire connections, module is faulty.	• Replace spark module assembly.
SECTION II No sparks appear at any electrodes when Electronic Ignition Button is pressed; noise **can** be heard from spark module.	• Output lead connections not connected.	• Are output connections on and tight?	• Remove and reconnect all output connections at module and electrodes.
SECTION III Sparks are present but not at all electrodes and/or not at full strength	• Output lead connections not connected.	• Are output connections on and tight?	• Remove and reconnect all output connections at module and electrodes.
	• Arcing to grill away from burner(s).	• If possible, observe grill in dark location. Operate ignition system and look for arcing between output wires and grill frame.	• If sparks are observed other than from burner(s), wire insulation may be damaged. Replace wires.
	• Weak battery.	• All sparks present but weak or at slow rate.	• Replace battery with a new alkaline battery.
	• Electrodes are wet.	• Has moisture accumulated on electrode and/or in burner ports?	• Use paper towel to remove moisture.
	• Electrodes cracked or broken "sparks at crack".	• Inspect electrodes for cracks.	• Replace cracked or broken electrodes.

NOTES

NOTES

NOTES

Char-Broil®
Grilling's Juicy Little Secret™

Please register your product online at:
Registre su producto en línea en:
Veuillez enregistrer votre produit à l'adresse:

www.charbroil.com/register

(If you register online, you do not need to send in this registration card.)
(Si registra en línea, no es necesario enviar esta tarjeta de registro.)
(Si vous enregistrez votre produit en ligne, il n'est pas nécessaire d'envoyer la carte d'enregistrement.)

PLEASE FILL OUT THIS CARD AND ATTACH A COPY OF YOUR SALES RECEIPT. RETURN IT WITHIN 10 DAYS OF PURCHASE. FOR WARRANTY SERVICE PROOF OF PURCHASE WILL BE REQUIRED. THIS WARRANTY IS NON-TRANSFERABLE.

LLENE ESTA TARJETA Y DEVUELVA LA DENTRO DE LOS 10 DIAS DE LA COMPRA. PARA EL SERVICIO DE GARANTIA ES NECESARIO QUE PRESENTE SU COMPROBANTE DE COMPRA. CONSERVE LA FACTURA. ESTA GARANTIA ES INTRANSFERIBLE.

VEUILLEZ COMPLETER CETTE CARTE ET LA RETOURNER DANS LES 10 JOURS SUIVANT L'ACHAT. POUR OBTENIR LE SERVICE SOUS GARANTIE, UNE PREUVE D'ACHAT DOIT ETRE PRESENTEE. VEUILLEZ CONSERVER VOTRE FACTURE. LA PRESENTE GARANTIE N'EST PAS TRANSFERABLE.

Required | Necesario | Exigé

~ PLEASE PRINT ~ IMPRIMA POR FAVOR ~ S'IL VOUS PLAÎT IMPRIMER ~

* 1 **First Name | Nombre | Prénom** _____ **Initial | Inicial | Initiale** _____ **Last Name | Apellido | Nom de Famillie** _____

Address (number & street) **| Dirección** (número y calle) **| Adresse** (numéro et rue) _____ **Apt Number | Nº de apart | Nº d'appt.** _____

City | Ciudad | Ville _____ **State | Estado | Province** _____ **Zip Code | Código Zip | Code Postal** _____

* 2 **E-mail Address | Dirección de correo electrónico | Adresse électronique** _____

* 3 **Phone Number | Número telefónico | Numéro de téléphone** _____

* 4 **Model Number | Número de modelo | Numéro de modèle** _____

Serial Number | Número de serie| Numéro de série _____

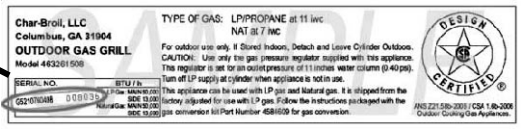

STICKER ON PRODUCT

* 5 *Attach copy of your sales receipt here.*

Adjunte aqui la copia de su recibo de compra

Veuillez attacher une copie de votre reçu ici.

6 **Date of Purchase | Fecha de compra | Date de l'achat** _____

7 **Store Name | Nombre de la tienda | Nom du magasin** _____

$ _____

8 **Purchase Price | Precio de compra | Prix d'achat**

9 **Your Gender | Sexo | Sexe:**

- ☐ Male | Masculino | Masculin
- ☐ Female | Femenino | Féminin

10 **Which product are you registering?**
¿Qué producto está registrando?
Quel produit enregistrez-vous?

1. ☐ Gas Grill | Parrilla a gas | Gril au gaz
2. ☐ Electric Grill | Parrilla eléctrica | Gril électrique
3. ☐ Smoker | Ahumador | Fumoir
4. ☐ Charcoal Grill | Parrilla a carbón | Barbecue au charbon
5. ☐ Cooker/Fryer | Cocina/freidora | Cuiseur/Friteuse
6. ☐ Other | Otro | Autre

Mail to: / Enviar a: / Envoyer à :

Char-Broil Warranty Registration
P.O. Box 1240
Columbus, GA 31902-1240

We respect your privacy. | Respetamos su privacidad. | Nous respectons votre vie privée.

- If you prefer not to receive special offers and promotions from Char-Broil, please check here: ☐
- Marque aquí si no desea recibir ofertas y promociones especiales de Char-Broil:
- Si vous préférez ne pas recevoir d'informations concernant des offres spéciales et des promotions de Charbroil, veuillez cocher ici:

Thank you for completing this questionnaire. | Gracias por completer este cuestionario. | Merci d'avoir bien voulu remplir ce questionnaire.

THANK YOU
FOR YOUR RECENT PURCHASE FROM

Char-Broil®
Grilling's Juicy Little Secret™

CHECK OUT THESE GREAT FEATURES ON OUR WEBSITE

- Valuable product information
- Inspiring grilling accessories
- Reliable customer support
- Delicious recipes and tips from chefs
- Exciting events and promotions
- And much more!

REGISTER YOUR PRODUCT TO RECEIVE A

SPECIAL OFFER

CHARBROIL.COM/REGISTER